

RECEIVED
CENTRAL FAX CENTER

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

NOV 03 2010

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 April 2003 (24.04.2003)


PCT

(10) International Publication Number
WO 03/034642 A2

- (51) International Patent Classification: H04L 1/06, 5/02, 27/26
- (21) International Application Number: PCT/CA02/01542
- (22) International Filing Date: 15 October 2002 (15.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/329,514 17 October 2001 (17.10.2001) US
60/329,507 17 October 2001 (17.10.2001) US
60/329,510 17 October 2001 (17.10.2001) US
10/038,915 8 January 2002 (08.01.2002) US
- (71) Applicant: NORTEL NETWORKS LIMITED
[CA/CA]; 2351 Boulevard Alfred-Nobel, St. Laurent, Quebec H4S 2A9 (CA).
- (72) Inventors: MA, Jianglei; 3 Bon Echo Cres., Kanata, Ontario K2M 2W5 (CA). JIA, Ming; 609-320 Croydon Avenue, Ottawa, Ontario K2B 5P3 (CA). ZHU, Pelying; 16 Pebble Creek Cres., Kanata, Ontario K2M 2L4 (CA). TONG, Wen; 12 Whitestone Drive, Ottawa, Ontario K2C 4A7 (CA).
- (74) Agents: BRETT, R., Allan et al.; Smart & Biggar, 900-55 Metcalfe Street, P.O. Box 2999, Station D, Ottawa, Ontario K1P 5Y6 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SYSTEM ACCESS AND SYNCHRONIZATION METHODS FOR MIMO OFDM COMMUNICATIONS SYSTEMS AND PHYSICAL LAYER PACKET AND PREAMBLE DESIGN

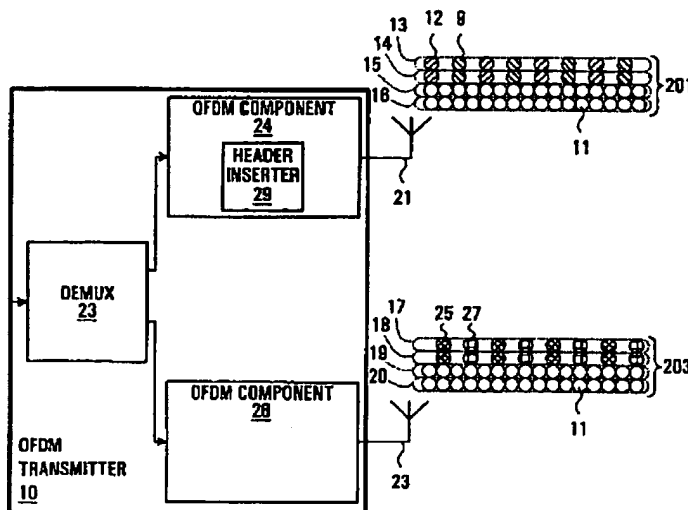

(57) Abstract: A method and apparatus are provided for performing acquisition, synchronization and cell selection within an MIMO-OFDM communication system. A coarse synchronization is performed to determine a searching window. A fine synchronization is then performed by measuring correlations between subsets of signal samples, whose first signal sample lies within the searching window, and known values. The correlations are performed in the frequency domain of the received signal. In a multiple-output OFDM system, each antenna of the OFDM transmitter has a unique known value. The known value is transmitted as pairs of consecutive pilot symbols, each pair of pilot symbols being transmitted at the same subset of sub-carrier frequencies within the OFDM frame.

- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#1
- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#2
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#1
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#2

WO 03/034642 A2

WO 03/034642 A2

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(84) **Designated States (regional):** ARIPO patent (GH, GM, KP, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, NG, SN, TD, TG).

Published:

-- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 03/034642

PCT/CA02/01542

1

SYSTEM ACCESS AND SYNCHRONIZATION METHODS FOR MIMO OFDM
COMMUNICATIONS SYSTEMS AND PHYSICAL LAYER PACKET AND
PREAMBLE DESIGN

FIELD OF THE INVENTION

5 This invention relates to cellular wireless communication systems, and more particularly to system access within cellular wireless communication systems employing OFDM or OFDM-like technology, and to physical layer packet and preamble designs.

10 BACKGROUND OF THE INVENTION

 In a wireless communication system having at least one transmitter and at least one receiver, the receiver must acquire the timing of a signal transmitted by the transmitter and synchronize to it before information can be
15 extracted from the received signal. The timing of signals transmitted from a base station, within a wireless communication system, is commonly referred to as the system timing.

 In cellular wireless communication systems
20 employing Orthogonal Frequency Division Multiplexing (OFDM), synchronization to the timing of a signal enables the exact positioning of a Fast Fourier transform (FFT) window utilised by a receiver of the signal to extract information from the signal.

25 In any cellular wireless communication system having multiple base stations (BTS) and multiple mobile communication devices the synchronization process must occur frequently between the BTS and the mobile communication devices for the system to be operable. The mobile
30 communication devices will simply be referred to hereinafter as UE (user equipment).

WO 03/034642

PCT/CA02/01542

2

Furthermore, each BTS defines a geographic transmission region, known commonly as a cell, in which UE in substantially close proximity to a particular BTS will access the wireless communication system. The process
5 whereby a particular UE selects a BTS from which to access the cellular wireless communication system is known as cell selection. In order to optimize the reception of the BTS signal, the UE needs to identify the best quality signal received from different BTSs and switch its receiver to tune
10 into the best BTS for a given time. Thus, due to the mobility of UE, the synchronization process has to be employed frequently in order to allow seamless handoffs from one BTS to another BTS as the UE changes location.

In most current cellular wireless communication
15 systems, fast system access and cell selection are essential functions for proper mobile UE operation. The objective of fast acquisition is to allow UE to synchronize into the desired BTS. The cell selection and re-selection is performed by UE to synchronize and measure the signal
20 (including the interference) power among the adjacent BTS and select and switch to the BTS with the best signal quality, namely the maximum C/I (carrier-to-interference) ratio.

Existing solutions to access a wireless
25 communication system employing OFDM (Orthogonal Frequency Division Multiplexing) were designed for wireless LAN (local area network) systems for fast packet access under a SISO (single input - single output) configuration. However, the wireless LAN does not have the capability to deal with the
30 UE mobility, which requires seamless BTS handoff. On the other hand some cellular systems e.g. 3G UMTS are capable of performing cell selection and BTS identification and BTS C/I ratio measurement.

WO 03/034642

PCT/CA02/01542

3

Multiple Input Multiple Output - Orthogonal Frequency Division Multiplexing (MIMO-OFDM) is a novel highly spectral efficient technology used to transmit high-speed data through radio channels with fast fading both in frequency and in time. For a high-speed downlink packet data transmission system, the design of the physical layer packet structure is a fundamental aspect.

OFDM technology has been adopted by DAB, DVB-T and IEEE 802.11 standards. DAB and DVB-T are used for audio and video territorial broadcasting. In these systems, the signal is transmitted in a continuous data stream. A preamble is not needed because fast packet access is not critical. DAB and DVB-T are also applied in single frequency networks. In this case, every transmitter transmits the same signal as a simulcast. The interference from the neighbouring transmitters can be treated as an active echo, which can be handled by the proper design of the prefix. IEEE 802.11 is the wireless LAN standard. It is a packet based OFDM transmission system. A preamble header is introduced in this standard.

Synchronization within MIMO-OFDM (Multiple Input Multiple Output-OFDM) systems, in which each transmitter and each receiver have multiple antennae, is even more difficult. Adding to the complexity of the task is that a fast synchronization process must be very reliable at very low C/I ratio conditions to allow a high rate of success for the entire cell. In addition, high mobility causes a high Doppler spread and this makes reliable synchronization even more difficult.

In MIMO-OFDM systems, synchronization can be performed in two steps. First, frame synchronization (also called coarse synchronization) is performed in order to determine the approximate range of the location of the

WO 03/034642

PCT/CA02/01542

4

starting position of the first OFDM symbol in the frame.
Second, timing synchronization (also called fine
synchronization) is performed to determine the precise FFT
window location, so that demodulation in the frequency
5 domain can be performed accurately.

Conventionally, fine synchronization is
implemented in time domain. This is achieved by inserting an
a priori known pilot training sequence in the time domain
for the receiver to perform the cross correlation computing
10 at select time slots.

For example, as shown in Figures 1A and 1B, the
OFDM frame structure of the IEEE 802.11 standard utilizes
several repeated short OFDM symbols generally indicated at 5
arranged as several headers in the time domain at the
15 beginning of the frame for select sub-carriers, followed by
training OFDM symbols 207 for fine synchronization. The
headers 5 are used for frame (i.e. course) synchronization.
The training OFDM symbols 207 are used to position the FFT
window precisely so that demodulation in the frequency
20 domain can be performed accurately. The training OFDM
symbols 207 are followed by a TPS OFDM symbol 205 and data
OFDM symbols 30.

The TPS (transmission parameter signalling) OFDM
symbol 205, shown more clearly in the frequency domain (see
25 Figure 1B), is transmitted with a frequency that corresponds
to an adaptive coding and modulation period. The training
OFDM symbols, TPS OFDM symbol and data OFDM symbols use all
sub-carriers. In the 802.11 system, the repeated headers
for course synchronization are only transmitted on every
30 fourth sub-carrier. This design is only suitable for a
simple SISO OFDM system with only a single transmit antenna.
For MIMO-OFDM system the preamble design is more complicated
because of the existence of multiple transmit antennas.

WO 03/034642

PCT/CA02/01542

5

Furthermore for mobile communications, an efficient preamble design is even more difficult because of the multi-cell environment, the requirement for initial access when no BTS information is available, BTS switching and even soft
5 handoff.

Existing methods in the process of cell acquisition and synchronization employ a 3-step-synchronization approach adopted by UMTS WCDMA system, which requires a relatively long access time. While fine
10 synchronization may be performed in the time domain, the self-interference of MIMO channels limits the performance of this approach under very low C/I conditions. Increasing the length of the correlation can enhance the performance of fine synchronization in the time domain but at the price of
15 an increase in overhead and processing complexity. The existing designs are based on the time domain training sequence correlation for a single transmit antenna and a single receive antenna system. However, a straightforward extension of such a time domain synchronization approach
20 will cause performance loss especially for low C/I ratio applications. The cause of the performance loss is the self-interference between the MIMO channels that is not easy to reduce in time domain.

25 SUMMARY OF THE INVENTION

One broad aspect of the invention provides a MIMO-OFDM transmitter adapted to transmit a header symbol format in which sub-carriers of a header OFDM symbol are divided into a non-contiguous set of sub-carriers for each of a
30 plurality of antennas, with each antenna transmitting the header OFDM symbol only on the respective set of sub-carriers.

WO 03/034642

PCT/CA02/01542

6

In some embodiments, there are N antennas and a different set of sub-carriers separated by N sub-carriers is assigned to each of the plurality of antennas.

5 In some embodiments, the header symbols contain a multiplexed dedicated pilot channel on dedicated pilot channel sub-carriers and common synchronization channel on common synchronization channel sub-carriers for each of the plurality of antennas.

10 In some embodiments, the header OFDM symbols further contain multiplexed broadcasting sub-carriers for each of the plurality of antennas.

In some embodiments, the transmitter is further adapted to transmit a preamble having a prefix, followed by two identical OFDM symbols having said header OFDM symbol
15 format. In some embodiments, the prefix is a cyclic extension of the two identical OFDM symbols.

In some embodiments, the pilot channel has a BTS specific mapped complex sequence allowing efficient BTS identification.

20 In some embodiments, the common synchronization channel is designed for fast and accurate initial acquisition.

In some embodiments, the common synchronization channel is used for course synchronization and fine
25 synchronization and the pilot channel is used for fine synchronization.

In some embodiments, the common synchronization channel is used to transmit a complex sequence which is different for each transmit antenna of one transmitter, but
30 which is common for respective transmit antennas of different transmitters within a communications network.

WO 03/034642

PCT/CA02/01542

7

In some embodiments, the transmitter is further adapted to transmit OFDM frames beginning with said preamble, and having scattered pilots throughout a remainder of the OFDM frame.

5 In some embodiments, during the preamble, for each of N transmit antennas, dedicated pilot channel sub-carriers are transmitted and common synchronization channel sub-carriers are transmitted and broadcasting channel sub-carriers are transmitted.

10 In some embodiments, the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {dedicated pilot channel for each of N transmit antennas, common synchronization channel sub-carrier for each of N transmit antennas} arranged in a predetermined order.

15 In some embodiments, the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {at least one dedicated pilot channel sub-carrier for each of N transmit antennas, at least one common synchronization channel sub-carrier for each of N transmit
20 antennas, at least one broadcast channel sub-carrier} arranged in a predetermined order.

Another broad aspect of the invention provides a MIMO-OFDM receiver adapted to receive a header symbol format in which sub-carriers of a header OFDM symbol are divided
25 into a non-contiguous set of sub-carriers for each of a plurality of antennas, with each antenna transmitting the header OFDM symbol only on the respective set of sub-carriers.

In some embodiments, the receiver is adapted to
30 receive from N transmit antennas with a different set of sub-carriers separated by N sub-carriers assigned to each of the plurality of transmit antennas.

WO 03/034642

PCT/CA02/01542

8

In some embodiments, the receiver is further adapted to perform fine synchronization on the basis of the common synchronization channel sub-carriers and/or the dedicated pilot channel sub-carriers.

5 Another broad aspect of the invention provides a transmitter adapted to transmit a packet data frame structure. The packet data frame structure has a superframe having a length corresponding to a synchronization period of a network; the superframe containing a plurality of radio
10 frames; each radio frame containing a plurality of TPS (transmission parameter signalling) frames corresponding to an adaptive coding and modulation period; each TPS frame containing a plurality of slots corresponding to an air interface slot size; each slot containing a plurality of
15 OFDM symbols, with the first two symbols of the first slot of the first TPS frame of each OFDM frame being used as header OFDM symbols.

In some embodiments, the header OFDM symbols have a header OFDM symbol format in which sub-carriers of a
20 header OFDM symbol are divided into a non-contiguous set of sub-carriers for each of a plurality of antennas, with each antenna transmitting the header OFDM symbol only on the respective set of sub-carriers.

In some embodiments, the header OFDM symbols
25 contain multiplexed pilot channel sub-carriers and common synchronization channel sub-carriers for each of the plurality of antennas.

In some embodiments, the header OFDM symbols further contain multiplexed broadcasting channel sub-
30 carriers for each of the plurality of antennas.

In some embodiments, the transmitter is further adapted to transmit in a plurality of different modes by

WO 03/034642

PCT/CA02/01542

9

transmitting a different number of OFDM symbols per slot with an unchanged slot duration and with no change to the frame structure above the slot.

In some embodiments, wherein modes with an
5 increased number of OFDM symbols per slot are realized by shortening OFDM symbol duration, and shortening FFT size, but not changing sampling frequency.

In some embodiments, the transmitter is further adapted to transmit to a respective set of users for each
10 TPS frame and to signal for each TPS frame which users should demodulate the entire TPS frame.

Another broad aspect of the invention provides a method of performing synchronization at an OFDM receiver. The method involves, at each of at least one receive
15 antenna, sampling a received signal to produce a respective set of time domain samples; determining at least one course synchronization position; at each of the at least one receive antenna:

a) for each of a plurality of candidate
20 fine synchronization positions about one of said at least one course synchronization position:

i) for each receive antenna
positioning an FFT window to the candidate fine
synchronization position and converting by FFT the time
25 domain samples into a respective set of frequency domain components;

ii) for each said at least one
transmit antenna, extracting a respective received training
sequence corresponding to the transmit antenna from the sets
30 of frequency domain components;

iii) for each transmit antenna,
calculating a correlation between each respective received

WO 03/034642

PCT/CA02/01542

10

training sequence and a respective known transmit training sequence;

iv) combining the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position;

b) determining a fine synchronization position from the plurality of correlation values;

combining the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position.

In some embodiments, a course synchronization position is determined for each receive antenna and used for determining the respective fine synchronization position.

In some embodiments, a course synchronization position is determined for each receive antenna and an earliest of the positions is used determining the fine synchronization positions for all receive antennas.

In some embodiments, the course synchronization position is determined in the time domain for at least one receive antenna by looking for a correlation peak between the time domain samples over two OFDM symbol durations.

In some embodiments, the method is applied at an OFDM receiver having at least two antennas, and combining the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position comprises selecting an earliest of the fine synchronization positions.

In some embodiments, sampling a received signal to produce a set of time domain samples is done for at least three OFDM symbol durations; determining at least one course synchronization position comprises performing a

WO 03/034642

PCT/CA02/01542

11

course synchronization in the time domain by looking for a correlation peak between the time domain samples received over two OFDM symbol durations to identify a course synchronization position by:

- 5 a) calculating a plurality of correlation values, each correlation value being a correlation calculated between a first set of time domain samples received during a first period having one OFDM symbol duration and a second set of time domain samples received
10 during a second period immediately following the first period and having OFDM symbol duration, for each of a plurality of starting times for said first period;
- b) identifying the course synchronization position to be a maximum in said plurality of correlation
15 values.

 In some embodiments, combining the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position comprises multiplying together the correlations for
20 the at least one transmit antenna for each candidate synchronization position.

 In some embodiments, the method is applied to a single transmit antenna single receive antenna system.

 In some embodiments, the training sequence is
25 received on common synchronization channel sub-carriers.

 In some embodiments, the training sequence is received during an OFDM frame preamble.

 In some embodiments, the training sequence is received on dedicated pilot channel sub-carriers.

30 In some embodiments, the training sequence is received during an OFDM frame preamble.

WO 03/034642

PCT/CA02/01542

12

- Another broad aspect of the invention provides an OFDM receiver having at least one receive antenna; for each said at least one receive antenna, receive circuitry adapted to sample a received signal to produce a respective set of
- 5 time domain samples; a course synchronizer adapted to determine at least one course synchronization position; a fine synchronizer comprising at least one FFT, at least one correlator and at least one combiner, adapted to, at each of the at least one receive antenna:
- 10 a) for each of a plurality of candidate fine synchronization positions about one of said at least one course synchronization position:
- i) for each receive antenna position an FFT window to the candidate fine synchronization
- 15 position and convert by FFT the time domain samples into a respective set of frequency domain components;
- ii) for each said at least one transmit antenna, extract a respective received training sequence corresponding to the transmit antenna from the sets
- 20 of frequency domain components;
- iii) for each transmit antenna, calculate a correlation between each respective received training sequence and a respective known transmit training sequence;
- 25 iv) combine the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position;
- b) determine a fine synchronization
- 30 position from the plurality of correlation values;

WO 03/034642

PCT/CA02/01542

13

the receiver being further adapted to combine the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position.

In some embodiments, the receiver has at least two
5 receive antennas, and is adapted to combine the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position by selecting an earliest of the fine synchronization positions.

In some embodiments, the receiver is adapted to
10 combine the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position by multiplying together the correlations for the at least one transmit antenna for each candidate synchronization position.

15 In some embodiments, the receiver is adapted to receive the training sequence on common synchronization channel sub-carriers.

In some embodiments, the receiver is adapted to receive the training sequence on dedicated pilot channel
20 sub-carriers.

Another broad aspect of the invention provides a method of performing fine synchronization. The method involves, at each at least one receive antenna receiving OFDM symbols containing a respective received frequency
25 domain training sequence for each of at least one transmit antenna; performing fine synchronization in the frequency domain by looking for maximum correlations between known frequency domain training sequences and the received frequency domain training sequences.

30 Another broad aspect of the invention provides a method of transmitting signals enabling fine synchronization. The method involves from each of at least

WO 03/034642

PCT/CA02/01542

14

one transmit antenna, transmitting OFDM symbols containing a respective frequency domain training sequence.

In some embodiments, a different frequency domain training sequence is transmitted by each transmit antenna, but the same frequency domain training sequence is transmitted by corresponding antenna of other transmitters.

Another broad aspect of the invention provides a method of performing cell selection at an OFDM receiver. The method involves at each of at least one receive antenna, sampling a received signal to produce a respective set of time domain samples; determining at least one course synchronization position; at each of the at least one receive antenna:

a) performing a frequency domain correlation between at least one received common synchronization sequence extracted from common synchronization channel sub-carriers in the received signal and a corresponding common synchronization sequence of a respective plurality of transmit antennas to identify a plurality of candidate correlation peaks;

b) selecting the M strongest correlation peaks for further processing;

c) at each correlation peak, reconverting time domain samples into frequency domain components and processing pilot channel sub-carriers, these containing transmitter specific information, to identify a transmitter associated with each correlation peak;

d) determining a C/I or similar value for each transmitter thus identified;

selecting the transmitter having the largest C/I determined for any of the at least one receive antenna.

WO 03/034642

PCT/CA02/01542

15

In some embodiments, performing a frequency domain correlation between at least one received common synchronization sequence extracted from common synchronization channel sub-carriers in the received signal and a corresponding common synchronization sequence of a respective plurality of transmit antennas to identify a plurality of candidate correlation peaks comprises:

- a) for each of a plurality of candidate fine synchronization positions about one of said at least one coarse synchronization position:
 - i) for each receive antenna positioning an FFT window to the candidate fine synchronization position and converting by FFT the time domain samples into a respective set of frequency domain components;
 - ii) for each of at least one common synchronization sequence, each common synchronization sequence having been transmitted by a transmit antenna of each of at least one transmitter, extracting a respective received training sequence corresponding to the transmit antennas from the sets of frequency domain components;
 - iii) for each of the at least one common synchronization sequence, calculating a correlation between each respective received common synchronization sequence and a respective known common synchronization sequence;
 - iv) combining the correlations to produce an overall correlation result for each candidate synchronization position;
- b) determining at least one peak in the correlations, each said at least one peak being local maxima in the correlations.

WO 03/034642

PCT/CA02/01542

16

In some embodiments, the method further involves reconvert-
ing time domain samples into frequency domain
components based on the fine synchronization position of the
selected transmitter and performing a further fine
5 synchronization based on a dedicated pilot channel for that
transmitter.

In some embodiments, the method is applied to a
MIMO-OFDM frame format having a header symbol format in
which subcarriers of a header symbol are divided into a non-
10 contiguous set of subcarriers for each of a plurality of
antennas, with each antenna transmitting header symbols only
on the respective set of sub-carriers, and wherein the
header symbols contain multiplexed pilot channel sub-
carriers and common synchronization channel sub-carriers for
15 each of the plurality of antennas, the frame beginning with
two identical header OFDM symbols during which contents of
the pilot channel sub-carriers are repeated and contents of
the synchronization channel sub-carriers are repeated, the
common synchronization channel sub-carriers carrying a
20 complex sequence which is different for respective antenna
of one base station and being common across multiple base
stations, and contents of the dedicated pilot channel sub-
carriers being at least locally unique to a particular base
station.

25 In some embodiments, the method further involves
for transmitter switching, averaging the C/I or similar
value over a time interval for each transmitter thus
identified, and at the end of the time interval instigating
a transmitter switch to the transmitter with the largest
30 average C/I or similar value if different from a currently
selected transmitted.

BRIEF DESCRIPTION OF THE DRAWINGS

WO 03/034642

PCT/CA02/01542

17

Preferred embodiments of the invention will now be described in greater detail with reference to the accompanying diagrams, in which:

Figure 1A is the frame structure of IEEE 802.11
5 standard in the time domain;

Figure 1B is the frame structure of Figure 1A in the frequency domain;

Figure 2A is a packet data frame structure provided by an embodiment of the invention;

10 Figure 2B is a packet frame hierarchy provided by an embodiment of the invention;

Figure 3 is a proposed header structure provided by an embodiment of the invention;

Figure 4 is a preamble header structure in the
15 time domain provided by an embodiment of the invention;

Figure 5 is a preamble header structure in the frequency domain provided by an embodiment of the invention;

Figure 6 is a conceptual schematic view of a MIMO-OFDM transmitter provided by an embodiment of the invention;

20 Figure 7A is a block diagram of a MIMO-OFDM coarse synchronization functionality;

Figure 7B is a block diagram of a MIMO-OFDM fine synchronization functionality;

Figure 8 is a plot of a signature sequence
25 correlation output for pilot channel showing several candidate synchronization position;

Figure 9 is a plot of a BTS identification simulation; and

WO 03/034642

PCT/CA02/01542

18

Figure 10 is a flowchart of a method for cell selection and re-selection for MIMO-OFDM provided by an embodiment of the invention.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figure 2A, an OFDM packet frame structure provided by an embodiment of the invention is shown. Transmit OFDM symbol streams are organised into such frames. Each frame consists of three major components:

10 preamble 300, scattered pilots 302, and traffic data symbols 304. The insertion of the preamble allows UE (user equipment) to perform the following fundamental operations: fast BTS (base station) access, BTS identification and C/I ratio measurement, framing and timing synchronization,

15 frequency and sampling clock offset estimation and initial channel estimation. The design of a frame preamble with minimized overhead is critical to maximum spectral efficiency and radio capacity.

Referring now to Figure 2B, a frame hierarchy for

20 MIMO-OFDM is organized according to an embodiment of the invention as follows: at the highest level are OFDM superframes 500 (two shown). The duration of the superframe is determined by the network synchronization period (for example 1-second). The superframe is composed of several 10

25 ms radio frames 502 also referred to as OFDM frames. There would be 100 10 ms OFDM frames 502 in a 1s superframe 500.

To support adaptive coding modulation (ACM), a fast signalling channel (TPS channel-transmission parameter signalling) is introduced. Each OFDM frame 502 is

30 subdivided into TPS frames 504, in the illustrated example there are five 2 ms TPS frames for each 10 ms radio frame 502. The frame length used for TPS in some embodiments is

WO 03/034642

PCT/CA02/01542

19

the same as the duration of the ACM unit. Each TPS frame also contains signalling information which allows each user to determine whether the current TPS frame contains data for them or not. A TPS frame may contain data for multiple
5 users.

The TPS frame 504 can be divided further into several slots 506, each of which consists of several OFDM symbols. In the illustrated example, each TPS frame 504 is subdivided into 3 slots 506. The duration of the slot 506
10 depends upon the air interface slot size. The smallest transmission unit is one OFDM symbol 508, 510. The duration of one OFDM symbol is determined by the transmission environment characteristics, for example, the maximum channel delay, the system-sampling clock and the maximum
15 Doppler. In the illustrated example, there are four OFDM symbols 508, 510 per slot 506.

To reduce the overhead caused by the insertion of the guard interval between OFDM symbols, different OFDM symbol modes each with a different symbol duration and a
20 different prefix can be designed, for example, 0.5k mode and 1k mode. To simplify the system the sampling frequency is kept unchanged when doing the mode switching. These different modes are described in more detail below.

The frame structure of Figure 2B gives an example
25 of a frame structure hierarchy compatible to the UMTS air-interface. At the OFDM symbol level, there are two different types of OFDM symbols. These include the preamble OFDM symbols 508 and regular data symbols 510.

Referring now to Figure 4, which is a time domain
30 representation, each OFDM frame starts with a preamble, which consists of several identical header OFDM symbols 603, 605 preceded by a prefix 607 which is a cyclic extension of the header OFDM symbols. A repetition structure is used to

WO 03/034642

PCT/CA02/01542

20

assist synchronization. By performing a correlation between adjacent OFDM symbols until two identical symbols are identified, the start of an OFDM frame can be found. By way of example, there may be 1056 samples used per OFDM symbol.

5 For the preamble, during the prefix 607, the last 64 samples of the header OFDM symbols are transmitted. There is no prefix for the second header OFDM symbol. The header is inserted periodically, and for the example of Figure 2B, this occurs every 10 ms, i.e. at the beginning of every OFDM

10 frame.

Referring again to Figure 2B, it is noted that for non-header OFDM symbols, i.e. for the regular OFDM symbols 510, every OFDM symbol preferably also has a prefix. In "1K" mode, there are 32 prefix samples, and 1024 actual

15 samples representing the FFT size, for a total of 1056 samples per symbol. In 1/2K mode, there is a 16 sample prefix, and then 512 samples per symbol (representing the FFT size) for a total of 528 samples/symbol.

Advantageously, using the frame structure of Figure 2B these

20 different modes can be supported without changing the sampling frequency. When in 1/2K mode, there are twice as many OFDM symbols 510 per slot 506. The particular mode chosen at a given instant should be such that the prefix size is greater than the maximum channel delay. in 1/K

25 mode, more OFDM symbols are sent with fewer sub-carriers. This is more robust to high Doppler, because the symbol duration is shorter. Also, the spacing between the sub-carriers is larger further enhancing tolerance to Doppler. Thus, there is a unified frame structure which accommodates

30 different FFT sizes, but with the same sampling rate at the receiver. Preferably the same preamble is used even for the different modes.

WO 03/034642

PCT/CA02/01542

21

OFDM is a parallel transmission technology. The whole useful bandwidth is divided into many sub-carriers, and each sub-carrier is modulated independently. According to an embodiment of the invention, to separate different antenna with multiple antennas transmission, during the header not all sub-carriers are used on all transmit antennas. Rather, the sub-carriers are divided between antennas. An example of this will now be described with reference to Figure 3. The sub-carrier frequencies contained within an OFDM symbol are each represented by circles. In this example it is assumed that there are two transmitting antennas in the MIMO system. Figure 3 shows OFDM symbols with the various sub-carriers spaced along the frequency axis 400, and with the contents of all the sub-carriers at a given instant representing one symbol in time, as indicated along the time axis 402. In this case, the first two OFDM symbols 408, 410 are used for dedicated pilot channel information while the remaining symbols (only two shown, 412, 414) are used for regular OFDM symbols. The dedicated pilot channel information transmitted on the first two OFDM symbols 408, 410 alternates by sub-carrier between being transmitted by the first antenna and the second antenna. This is indicated for the first sub-carrier 404 which is transmitting dedicated pilot channel information for the first transmitter and sub-carrier 406 which is transmitting dedicated pilot channel information for the second sub-carrier, and this pattern then repeats for the remainder of the sub-carriers. The other OFDM symbols 412, 414 contain information transmitted by both antennas. It is to be understood that other spacings could alternatively be used. Furthermore, if there are more than two transmit antennas, the pilot channel information would then alternate by sub-carrier in some predetermined pattern between all of the transmit antennas.

WO 03/034642

PCT/CA02/01542

22

In another embodiment, a common synchronization channel, and dedicated pilot channel are frequency multiplexed onto the header symbols. A respective set of non-overlapping sub-carriers are assigned for each antenna to transmit respective dedicated pilot channel and common synchronization channel.

In another embodiment a common synchronization channel, dedicated pilot channel and a broadcasting channel are frequency multiplexed onto the header symbols. Under this arrangement, the total useful sub-carriers of the header symbols are separated into three groups. These three groups are mapped onto the common synchronization channel, dedicated pilot channel and the broadcasting channel respectively.

An example of the mapping of the different channels in the MIMO-OFDM system with two-transmitter diversity is shown in Figure 5. In this example, there are shown four OFDM symbols 712, 714, 716, 718 two of which 712, 714 are header symbols. During the header symbols 712, 714 every second sub-carrier is used for the first antenna with the remaining sub-carriers used for the second antenna. This is easily generalized to higher numbers of antennas. For this example, it is assumed that there are two transmit antennas in the MIMO system. Every sixth sub-carrier starting at the first sub-carrier 700 is for the first transmitter dedicated pilot channel sub-carriers. Every sixth sub-carrier starting at the second sub-carrier 702 is for the second transmitter dedicated pilot channel sub-carrier. Every sixth sub-carrier starting at the third sub-carrier 704 is for the first transmitter common synchronization channel sub-carrier. Every sixth sub-carrier starting at the fourth sub-carrier 706 is for the second transmitter common synchronization channel sub-

WO 03/034642

PCT/CA02/01542

23

carrier. Every sixth sub-carrier starting at the fifth sub-carrier is for broadcasting channel sub-carriers for the first antenna, and every sixth sub-carrier starting at the sixth sub-carrier 710 is for broadcasting channel sub-carriers for the second antenna.

The common synchronization channel is a universal channel for initial access. It can also be used for synchronization and preliminary channel estimation. The different transmitters share the common synchronization sub-carriers when transmitter diversity is applied. In which case as indicated above the common synchronization channel is divided between different transmitters. A common complex sequence known by all the terminals is used to modulate the sub-carriers reserved for the common synchronization channel. The same common synchronization sequence is transmitted by all base stations within a system. There may be one or more such synchronization sequences in the event that there are multiple transmit antennas such that each transmit antenna can transmit a unique synchronization sequence. Using the synchronization sequence, mobile stations are able to find initial synchronization positions for further BTS identification by looking for a correlation peak between received synchronization sequence and the known transmitted synchronization sequence.

The dedicated pilot channel is used for BTS/cell identification, and supports C/I measurement for the cell selection, cell switching and handoff. A unique complex sequence, for example a PN code, is assigned to each BTS and used to modulate the dedicated pilot sub-carriers. A different unique sequence is transmitted by each antenna in the multiple transmit antenna case. Unlike the case for the common synchronization channel, different base stations transmit using different pilot sequences. The quasi-

WO 03/034642

PCT/CA02/01542

24

orthogonality of the PN codes assigned to different BTSs makes it possible to do access point identification and initial interference measurement. The dedicated pilot channel can also be used to assist the synchronization
5 processing.

To fully utilize the sub-carriers in the header OFDM symbols, as indicated above, some sub-carriers are preferably used as a broadcasting channel. In the example of Figure 5, two of every six sub-carriers are used for this
10 purpose. The broadcasting channel can carry important system information. STTD (space time transmit diversity) schemes cannot be used for the broadcasting channel (or any of the sub-carriers in the header OFDM symbols) because of it will destroy the repetition structure of the header OFDM
15 symbols which is required by synchronization algorithms. However transmitting the broadcasting information by all transmitters on the same sub-carrier may cause destructive interference between transmitters. To solve that problem the broadcasting channel is partitioned between different
20 transmitters, so in the two transmit antenna case, the sub-carriers (mapped for the broadcasting channel) can be assigned alternatively for the transmit antenna to provide diversity. Power boosting may be applied to further enhance the broadcasting channel.

25 The broadcasting information from different BTS's can be different. In some embodiments broadcasting information is protected so those users close to the cell boundaries can receive it correctly in the presence of strong interference. A short PN code could be used to
30 spread the broadcasting information. The neighbouring BTS is assigned to use different code. The insertion of the broadcasting channel reduces the preamble overhead and increases the spectrum efficiency.

WO 03/034642

PCT/CA02/01542

25

The broadcast channel is used to transmit information unique to the particular base station. A single broadcast message may be sent on the combined broadcast channel carriers for the two antennas. By designing the preamble header symbol to consist of pilot channel, synchronization channel and the broadcasting channel, the preamble header overhead is reduced. The common synchronization channel is designed for fast and accurate initial acquisition. The dedicated pilot channel with a BTS specific mapped signature allows an efficient BTS identification. The combined common synchronization channel and the pilot channel are used together for MIMO channel estimation. The use of the combined common synchronization channel and the dedicated pilot channel also allows for high accuracy synchronization. Frequency domain training symbols are robust to timing error and multipath environments. The preamble design allows the flexibility of the user equipment to implement more efficient algorithms.

It is noted that the specific breakdown of sub-carriers between the dedicated pilot channel in one embodiment, between the dedicated pilot channel and common synchronization channel in another embodiment, and between the dedicated pilot channel, common synchronization channel and broadcast channels in another embodiment, are only specific examples. These can be allocated in any suitable manner.

Referring now to Figure 6, shown is a conceptual schematic of a MIMO-OFDM transmitter 10. A first sample set of four OFDM symbols 201 is shown transmitted from a first transmit antenna 21 and a second sample set of four OFDM symbols 203 is shown transmitted from a second transmit antenna 23. In general an OFDM transmitter will have N_{ant} transmit antennae, where N_{ant} is a design parameter. Within

WO 03/034642

PCT/CA02/01542

26

the MIMO-OFDM transmitter 10, data originating from a demultiplexer 23 are sent to one of either a first OFDM component 24 connected to transmit antenna 21 or a second OFDM component 26 connected to transmit antenna 23. The components organize the data onto sub-carriers of OFDM symbols and OFDM frames, each sub-carrier being at a different orthogonal frequency. Each OFDM component 24,26 has a respective header inserter 29 which inserts header OFDM symbols. The sample sets of OFDM symbols 201 and 203 represent the first four OFDM symbols of the transmitted OFDM frame from transmit antennae 21 and 23, respectively, where each row of data symbols or pilot symbols is an OFDM symbol. A first OFDM symbol 13 and a second (identical to the first) OFDM symbol 14 represent the two header OFDM symbols unique to the OFDM frame transmitted by first transmit antenna 21. Similarly, a third OFDM symbol 17 and a fourth (identical to the third) OFDM symbol represent the two header OFDM symbols unique to the OFDM frame transmitted by the second transmit antenna 23. Four OFDM symbols 15, 16, 19, 20 are typically non-identical OFDM symbols made up of a plurality of data symbols, with at least one data symbol indicated generally at 11 on each OFDM sub-carrier. An entire OFDM frame would typically have many more data symbols. Also, the OFDM symbols 201 are transmitted concurrently, and with the same timing, as OFDM symbols 203.

In this example, the two identical header OFDM symbols consist of dedicated pilot channel sub-carriers 12 and common synchronization channel sub-carriers 9. There may also be broadcast channel sub-carriers, not shown. The dedicated pilot channel sub-carriers are used for C/I ratio measurement and BTS identification and fine synchronization as detailed below; they can also be used for initial channel estimation. The common synchronization channel sub-carriers 9 are used for course synchronization and fine

WO 03/034642

PCT/CA02/01542

27

synchronization, initial access, and initial channel estimation.

In the illustrated example, during the two header OFDM symbols, the first of every four consecutive sub-carriers is used to carry dedicated pilot channel symbols transmitted by transmitting antenna 21. Similarly, the second of every four consecutive sub-carriers is used to carry dedicated pilot channel symbols transmitted by transmitting antenna 23.

The dedicated pilot channel symbols transmitted on the pilot channel sub-carriers 12, 25 are defined by base station/sector specific PN sequence. A set of symbols from a complex pseudo-random PN sequence unique to the base station is mapped onto the dedicated pilot channel sub-carrier locations in the header OFDM symbols.

The third of every four consecutive sub-carriers in the two header symbols is used to carry common synchronization channel symbols transmitted by transmitting antenna 21. Similarly the fourth of every four consecutive sub-carriers is used to common synchronization channel symbols transmitted by transmitting antenna 23.

The common synchronization channel symbols transmitted on the common synchronization sub-carriers 9, 27 are defined by unique complex pseudo-random PN sequence for each transmit antenna 21 and 23. A set of symbols from this complex pseudo-random PN sequence is mapped onto the common synchronization channel sub-carriers in the header OFDM symbols. That is, the common synchronization channel symbols of each frame transmitted through each transmitting antenna use a PN code unique to that transmitting antenna but which is the same for corresponding transmitting antennas of other base stations. In the present example $PN_{sync}^{(1)}$ is associated with transmit antenna 21 and $PN_{sync}^{(2)}$ is

WO 03/034642

PCT/CA02/01542

28

associated with transmit antenna 23. However, similar antennae in different transmitters throughout the communication network will use the same PN code. For example, the common synchronization channel symbols for a first transmit antenna 21 on all transmitters within the network will use one PN code ($PN_{\text{SYNC}}^{(1)}$), and the common synchronization channel symbols for a second transmit antenna 22 on all transmitters within the network will use a different PN code ($PN_{\text{SYNC}}^{(2)}$).

Referring to Figure 7A, a block diagram of MIMO-OFDM receiver functionality is shown which is adapted to perform coarse synchronization based on the two repeated OFDM header symbols transmitted by each transmit antenna as detailed above. The OFDM receiver includes a first receiving antenna 734 and a second receiving antenna 735 (although more generally there will be a plurality of N receiving antennae). The first receiving antenna 734 receives a first received signal at RF receiver 736. The first received signal is a combination of the two signals transmitted by the two transmitting antennae 21 and 23 of Figure 6, although each of the two signals will have been altered by a respective channel between the respective transmitting antenna and the first receiving antenna 734. The second receiving antenna 735 receives a second received signal at RF receiver 739. The second received signal is a combination of the two signals transmitted by the two transmitting antennae 21 and 23, although each of the two signals will have been altered by a respective channel between the respective transmitting antenna and the second receiving antenna 735. The four channels (between each of the two transmitting antennae and each of the two receiving antennae) may vary with time and with frequency, and will in general be different from each other.

WO 03/034642

PCT/CA02/01542

29

Coarse synchronization is performed for the first receive antenna 734 by a coarse synchronizer 737 on discrete time samples of a received signal to determine an approximate range of a location of the starting position of the first header symbol. A similar process is performed by course synchronizer 741 for the second antenna 735. Coarse synchronization is facilitated by the use of repeated header symbols at the OFDM transmitter. The coarse synchronizer 737 performs correlation measurements on time domain signal samples in successive OFDM symbols. The time domain signal sample yielding the highest correlation measurement is the coarse synchronization position n_{coarse} . The course synchronization position n_{coarse} is then used as the position on which to locate an FFT window within the FFT functions used in fine synchronization.

Initially, the coarse synchronizer 737 starts the time domain coarse synchronization processing. A running buffer (not shown) is used to buffer discrete time samples of the received signal over three successive OFDM symbol period, and then calculates the auto-correlation $\gamma_t(n)$ between samples collected during two successive OFDM symbol durations as follows:

$$\gamma_t(n) = \sum_{i=0}^{N_{\text{header}}-1} x(n+i) x^*(n+i+N_{\text{header}})$$

where $x(n)$ is the time domain samples of the received signal, N_{header} is the number of samples taken over one OFDM symbol duration.

In some embodiments, a moving correlator is applied in the real time implementation to save calculation power.

In one embodiment, the values of $\gamma_t(n)$ are calculated in sequence, for $n=1$ (until $n = N_{\text{header}}$), until a

WO 03/034642

PCT/CA02/01542

30

correlation value is above a threshold, after which a maximum search is enabled. The computation of the correlation values continues and the maximum search process will continue until the correlation result is below the threshold again. The sample position corresponding to the maximum correlation value is the coarse synchronization position:

$$n_{\text{course}} = \arg \max(|\gamma_c(n)|) \quad n \in \{\gamma_c(n) > \gamma_{\text{threshold}}\}$$

The threshold is typically calculated from the average auto-correlation values within one frame. Alternatively, another way of finding the maximum is to determine a local maximum for each OFDM symbol over an OFDM frame which might be 60 symbols in length for example. Then, the overall maximum is taken to be the maximum of the local maxima. This process is conducted both course synchronizers. In the event fine synchronization is to proceed jointly, the overall course synchronization position may be taken as some combination of the two synchronization values, and is preferably taken to be the earlier of two course synchronization positions thus determined. Alternatively, each fine synchronizer (detailed below) can work from a respective course synchronization position.

Referring to Figure 7B, a block diagram is shown of an MIMO-OFDM fine synchronization functionality is shown. In one embodiment, the fine synchronization functionality is adapted to perform fine synchronization based on the two-repeated OFDM header symbols transmitted by each transmit antenna as detailed above using the common synchronization channel and/or the dedicated pilot channel. More generally, the fine synchronization functionality can perform fine synchronization for OFDM frames within which some known training sequence has been embedded. Also, an input to the fine synchronization process is a course synchronization

WO 03/034642

PCT/CA02/01542

31

position. This coarse synchronization position may be determined using the above discussed method, or using any other suitable method. The components which are identical to those of Figure 7A are similarly numbered and in an
5 actual implementation would be shared if the common synchronizers of Figure 7A are to be used. The functionality of Figure 7B is replicated for each of the one or more receive antenna.

A fine synchronization process is performed for
10 each of one or more receive antennae, and then an overall synchronization position is taken based on a combination of the fine synchronization positions. By way of overview, once the coarse synchronizers have determined the coarse synchronization position(s) n_{coarse} , each fine synchronizer
15 performs an FFT on the signal samples on either side of the coarse synchronization position, to generate frequency domain components over the frequency band of OFDM sub-carriers. Each fine synchronizer searches the frequency domain components in order to locate the precise location of
20 the FFT window. The precise location of the FFT window is required in order to perform OFDM demodulation in the frequency domain. The fine synchronizer locates the precise location of the FFT window by performing correlation measurements between the known PN codes ($\text{PN}_{\text{SYNC}}^{(1)}$ & $\text{PN}_{\text{SYNC}}^{(2)}$)
25 and the frequency components within a searching window defined with respect to the coarse synchronization position n_{coarse} . The correlation measurements performed by each fine synchronizer are performed in the frequency domain, and one set of correlation measurements is performed for each known
30 PN code ($\text{PN}_{\text{SYNC}}^{(1)}$ & $\text{PN}_{\text{SYNC}}^{(2)}$), that is, for each transmitting antenna 21 and 23 (or for how many of the one or more transmit antenna there are).

WO 03/034642

PCT/CA02/01542

32

Each fine synchronizer selects N_{symbol} signal samples starting at an initial signal sample within the searching window, where N_{symbol} is the number of signal samples in an OFDM symbol. For each transmitting antenna,
 5 each fine synchronizer determines a correlation measurement between the frequency domain signal samples and the PN code corresponding to the transmitting antenna.

More specifically, fine synchronization searching is performed near n_{coarse} . Supposing that the searching window
 10 is $2N+1$, the searching range is from $(n_{\text{coarse}} - N)$ to $(n_{\text{coarse}} + N)$. Let $n_{\text{start}}(i) = n_{\text{coarse}} + N - i$ represent the sample index within the fine searching window, where $i=0, \dots, 2N$. The fine synchronization starts from $i=0$. Then N_{symbol} samples are taken starting from $n_{\text{start}}(0)$, the prefix is removed and FFT
 15 is performed. The received OFDM symbol in frequency domain can be written as:

$$R(l, i) = \text{FFT}(x(n(i), l)), n(i) = [n_{\text{start}}(i) + N_{\text{prefix}}, n_{\text{start}}(i) + N_{\text{symbol}} - 1]; l = 1, \dots, N_{\text{FFT}}$$

where N_{prefix} is the number of prefix samples and N_{FFT} is the FFT size.

20 From R , the complex data $R^{(j,k)}_{\text{SYNC}}$ carried by the common synchronization channel of different transmitters is extracted, since common synchronization channels are divided between different transmitters in MIMO OFDM system. More generally, the complex the data corresponding to a
 25 transmitted training sequence is extracted. The correlation between $R^{(j,k)}_{\text{SYNC}}$ and $PN^{(j)}_{\text{SYNC}}$ is:

$$\gamma_f^{(j,k)}(i) = \sum_{m=0}^{N_{\text{SYNC}}-1} R^{(j,k)}_{\text{SYNC}}(m, i) \cdot PN^{(j)}_{\text{SYNC}}(m), i = 0, \dots, 2N$$

where $j=1, 2, \dots, N_{\text{Tx}}$ indicates transmitter, $k=1, 2, \dots, N_{\text{Rx}}$ indicates receiver, $PN^{(j)}_{\text{SYNC}}$ is the common SYNC PN code for
 30 j^{th} transmitter and N_{SYNC} is the size of common PN code.

WO 03/034642

PCT/CA02/01542

33

Then the starting point index n_{start} is shifted by one ($n_{start}(1) = n_{start}(0) - 1$), and another N_{symbol} samples are processed as described above. In order to get the new frequency domain data $R^{(j,k)}_{sync}(m,i)$, we need to perform FFT again. An iterative method can be used for this purpose to reduce the computational complexity:

$$R(l,i) = R(l,i-1) \cdot e^{j2\pi(k-1)/NFFT} + x(n_{start}(i) + N_{prefix}) - x(n_{start}(i-1) + N_{symbol} - 1)$$

where NFFT is the FFT size. Extracting $R^{(j,k)}_{sync}(m,i)$, the new correlation is calculated. The above procedure is continued until n_{start} moves out of the fine searching window.

For each

$$n_{fine} = \arg \max \left(\prod_{j=1}^{N_n} \prod_{i=1}^{N_s} | \gamma^{(j,k)}_f(i) | \right) \quad \begin{array}{l} \text{receive antenna, a} \\ \text{15 respective fine} \end{array}$$

synchronization position can be found by finding $n_{start}(i)$ corresponding to the maximum of the products of the correlation results from different antennas over $i = 0, \dots, 2N$. In mathematical terms, for the k th receive antenna, a respective fine synchronization position can be selected according to:

$$n_{fine}(k) = \arg \max \left(\prod_{j=1}^{N_n} | \gamma^{(j,k)}(i) | \right)$$

To reduce the possibility of false alarm, a criterion may be set. For example, the fine synchronization may be considered to be achieved if the following condition is satisfied,

$$\max \left(\prod_{j=1}^{N_n} | \gamma^{(j,j)}(i) | \right) > N_{threshold} \cdot \frac{1}{2N+1} \cdot \sum_{i=0}^{2N} \prod_{j=1}^{N_n} | \gamma^{(j,j)}(i) |$$

where $N_{threshold}$ is a factor determined by the pre-set fine searching window size. Preferably, an overall fine

WO 03/034642

PCT/CA02/01542

34

synchronization position is then taken to be the earliest of the fine synchronization positions determined for the different receive antennas.

The fine synchronization process for one receive antenna is illustrated diagrammatically in Figure 7B. At the output of the first receiver 736, blocks D0 738 through D2N 742 represent alignment of the FFT blocks 744,...,748 for the various candidate fine synchronization positions ($2N+1$ in all). The FFT blocks 744,...,748 compute an FFT on each respective set of samples. Each FFT output is fed to a correlator block for each transmit antenna. If there are two transmit antennae, then there would be two such correlator blocks per FFT output. For example FFT 744 has an output fed to a first correlator block 745 for the first transmit antenna, and fed to a second correlator block 755 for a second transmit antenna. It is noted that if the spacing of the sub-carriers used to transmit the training sequence (the common synchronization sequence or pilot channel sequence in the above examples), a full FFT does not need to be completed in order to recover the training sequence components. The correlator block 745 for the first antenna multiplies with multiplier 747 the recovered training sequence symbol locations of the FFT output by the known training sequence for the first transmit antenna and these multiplications are added in summer 751. This same computation done in correlator 755 for the known training sequence of the second transmit antenna and the training sequence locations for the second transmit antenna. This is done at the first receiver for all of the different possible shifts for each transmit antenna. The correlation results across different transmit antennas for each possible shift are multiplied together in multipliers 753. The shift which results in the maximum of these multiplications is selected to be the fine synchronization position for the particular

WO 03/034642

PCT/CA02/01542

35

receiver. The same process is followed for any other receive antennas, and the overall fine synchronization position is preferably taken as the earliest of the fine synchronization positions thus computed.

5 The timing synchronization can be tracked every frame in case that the synchronization position drifts or losses. For example, in systems employing the previously described preamble, each time a preamble arrives at the receiver the 2-step process of synchronization is repeated,
10 using the same method for coarse synchronization and fine synchronization. In this case, a smaller searching window N may be used based on the assumption that the drift of the synchronization position should be around the vicinity of the current location. After acquisition, the dedicated
15 pilot channel code assigned to modulate dedicated pilot channels for different BTS can be used in the correlator, or the common synchronization sequence can be used, or some other training sequence.

 An embodiment of the invention has been described
20 with respect to an MIMO-OFDM transmitter having more than one transmitting antenna. The method of performing synchronization at the OFDM receiver may also be applied to a signal received from an OFDM transmitter having only one transmitting antenna, as long as a known training sequence
25 is inserted in the frame by the OFDM transmitter.

 Lastly, in the embodiment of the invention described thus far there has only been one transmitter having multiple antennae and one receiver having multiple antennae. In what follows, the concepts of the invention
30 will be broadened to encompass the multi-cellular environment having many MIMO-OFDM transmitters and many MIMO-OFDM receivers.

Access in a Multi-Cellular Environment

WO 03/034642

PCT/CA02/01542

36

System access in a multi-cellular environment introduces the new problem of cell selection, as there will be many transmitters transmitting the same common pilot symbols. In another embodiment of the invention, the
5 previously introduced transmit header is used by receivers to perform systems access and cell selection.

During initial acquisition, the UE starts by performing coarse synchronization. This may be done using the previously described methods, or some other method.
10 After one frame duration, the coarse synchronization position is determined. Fine synchronization search algorithm is performed afterwards based on the common synchronization channel. Because the data carried by the common synchronization channel are the same for all BTS,
15 several fingers (peaks) can be observed in a multi-cell environment and multi-path fading propagation channels. These fingers usually correspond to different BTS and/or different paths. Referring to Figure 8, shown is an example of fine synchronization (to the common synchronization
20 channel) raw output computed in a multi-cellular environment as a function of sample index. In the present example there are five significant fingers 400, 402, 404, 406, and 408. The M strongest fingers are chosen and the corresponding positions are located, where M is a system design parameter.
25 These positions are used as candidates for final synchronization and also as the positions upon which BTS identifications are made.

The results of Figure 8 do not allow BTS identification because BTS transmit the same common
30 synchronization sequences. At each candidate synchronization position, the correlations of the received dedicated pilot channel sub-carriers and all possible complex sequences (dedicated pilot PN sequences) assigned to

WO 03/034642

PCT/CA02/01542

37

different BTS are calculated to scan for the presence of all the possible adjacent BTSS. In the multiple transmit antenna case, preferably this correlation is done on the basis of the combined dedicated pilot PN sequences of the multiple antennas over all of the dedicated pilot sub-carriers to generate a single correlation result for each index. Figure 9 shows an example of the relation between the BTS scanning results and the checking points (candidate synchronization positions). The BTS identification is realized by detecting the PN code corresponding to the maximum correlation value at each candidate synchronization position. C/I can be computed based on all correlation results at each checking position. At the initial acquisition stage, the cell selection is determined by selecting the BTS with the largest C/I ratio. In the present example two BTS are identified, a first BTS BTS1 and a second BTS BTS2. With multiple-antenna receiver diversity, the final decision of the cell selection should be based on the comparison of the highest C/I obtained by different receiver antennae at a receiver.

To obtain the final synchronization position, fine synchronization is performed again, but by using the dedicated pilot channel and the dedicated complex sequence found through the BTS identification. A smaller searching window around the fine synchronization position is used. The final synchronization results from different receivers are compared. The position corresponding to the earliest sample in time is used as the final synchronization position. This step is to reduce the possibility that a weak path (multi-path) is selected because of the short-term fading. To reduce the false alarm probability, a threshold is set. This threshold can be the ratio of the finger strength with respect to the final synchronization position and the average of the correlation within the search window.

WO 03/034642

PCT/CA02/01542

38

In the normal data processing stage, the fine synchronization and the BTS identification steps are repeated every frame when a new preamble is received, but a small set of the candidate PN codes is applied in the BTS scan. After BTS identification, a BTS candidates list can be generated through searching strong interferences. This list is updated periodically, for example every 10 ms, and provides information for BTS switch and even soft handoff. Certain criteria can be set in order to trigger the BTS switch and soft handoff. To average the impact from the fading, the decision for BTS switching and the soft handoff may be based on observation during a certain period. The criteria can be the comparison of the maximum correlation values representing C and the strongest I. It should be noted that after the cell switch and the soft handoff, the synchronization may also be adjusted by the final step in the initial access. The overall cell selection and re-selection method is shown in Figure 10.

In the first step 600, coarse synchronization is performed for example based on the preamble header in the time domain. This involves finding a coarse boundary between each frame by looking for two identical symbols. Correlating samples over adjacent symbol durations until a peak is found does this. Step 600 relies on a preamble to a frame beginning with two adjacent identical symbols.

Next during step 602, at the coarse synchronization peaks, an FFT is computed, and a switch to the processing of the common synchronization channel in the frequency domain is made. A search window is centered on sync position +/- a certain number of samples. The M strongest correlation peaks are selected, as per 604. At this time, it is not known which BTS each peak is associated with. BTS identification has not yet been determined.

WO 03/034642

PCT/CA02/01542

39

Then at step 606, for each correlation peak, the FFT is again computed and the correlations associated with the fine synchronization procedure are computed using the dedicated pilot channels - these containing a base station specific complex sequences. This is immediately followed by step 608 where the correlation with the BTS identification complex sequences is made in order to allow an identification of the associated base stations. At step 610, a C/I ratio is computed for each BTS thus identified. BTS selection and BTS switching is performed on the basis of these C/I ratios in step 612. As indicated above, BTS switching is performed on the basis of these C/I ratios averaged over some time interval.

Finally, for access, the FFT is computed and fine synchronization is applied to the dedicated pilot channel of the BTS with the largest C/I ratio as per step 614.

BTS initial synchronization performed on the common synchronization channel. A BTS specific sequence is embedded in the frequency domain and BTS identification processing is performed in the frequency domain allowing the elimination of MIMO-OFDM inter-channel interference. BTS power estimation is performed based on the pilot channel for each MIMO-OFDM BTS. BTS selection is performed based on C/I ratio measurements.

The result is improvement of the synchronization and identification of the serving BTS in a severe multi-path channel and high interference environment by joint BTS synchronization and cell selection. Channel estimation may be performed on a combined common synchronization channel and dedicated pilot channel. Criteria are provided for cell switching and soft handoff by C/I estimation.

In the above example, the access has been performed based on the synchronization channel and pilot

WO 03/034642

PCT/CA02/01542

40

channel embedded in the previously discussed preamble. More generally, the access can be performed with such channels embedded in any suitable manner within an OFDM symbol stream.

- 5 What has been described is merely illustrative of the application of the principles of the invention. Other arrangements and methods can be implemented by those skilled in the art without departing from the spirit and scope of the present invention.

WO 03/034642

PCT/CA02/01542

41

We claim:

1. A MIMO-OFDM transmitter adapted to transmit a header symbol format in which sub-carriers of a header OFDM symbol are divided into a non-contiguous set of sub-carriers
5 for each of a plurality of antennas, with each antenna transmitting the header OFDM symbol only on the respective set of sub-carriers.
2. A transmitter according to claim 1 wherein there are N antennas and a different set of sub-carriers separated
10 by N sub-carriers is assigned to each of the plurality of antennas.
3. A transmitter according to claim 1 wherein the header symbols contain a multiplexed dedicated pilot channel on dedicated pilot channel sub-carriers and common
15 synchronization channel on common synchronization channel sub-carriers for each of the plurality of antennas.
4. A transmitter according to claim 3 wherein the header OFDM symbols further contain multiplexed broadcasting sub-carriers for each of the plurality of antennas.
- 20 5. A transmitter according to claim 1, adapted to transmit a preamble having a prefix, followed by two identical OFDM symbols having said header OFDM symbol format.
6. A transmitter according to claim 5 wherein the
25 prefix is a cyclic extension of the two identical OFDM symbols.
7. A transmitter according to claim 3 wherein the pilot channel sub-carriers have a BTS specific mapped complex sequence allowing efficient BTS identification.
- 30 8. A transmitter according to any one of claims 3 wherein the common synchronization channel is designed for fast and accurate initial acquisition.

WO 03/034642

PCT/CA02/01542
- - -

42

9. A transmitter according to claim 3 wherein the common synchronization channel is used for course synchronization and fine synchronization and the pilot channel is used for fine synchronization.
- 5 10. A transmitter according to claim 3 wherein the common synchronization channel is used to transmit a complex sequence which is different for each transmit antenna of one transmitter, but which is common for respective transmit antennas of different transmitters within a communications
10 network.
11. A transmitter according to claim 1 adapted to transmit OFDM frames beginning with said preamble, and having scattered pilots throughout a remainder of the OFDM symbols in each OFDM frame.
- 15 12. A transmitter according to claim 1 wherein during the preamble, for each of N transmit antennas, dedicated pilot channel sub-carriers are transmitted and common synchronization channel sub-carriers are transmitted and broadcasting channel sub-carriers are transmitted.
- 20 13. A transmitter according to claim 3 wherein the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {dedicated pilot channel for each of N transmit antennas, common synchronization channel sub-carrier for each of N transmit antennas} arranged in a
25 predetermined order.
14. A transmitter according to claim 4 wherein the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {at least one dedicated pilot channel sub-carrier for each of N transmit antennas, at least one
30 common synchronization channel sub-carrier for each of N transmit antennas, at least one broadcast channel sub-carrier} arranged in a predetermined order.

WO 03/034642

PCT/CA02/01542

43

15. A MIMO-OFDM receiver adapted to receive a header symbol format in which sub-carriers of a header OFDM symbol are divided into a non-contiguous set of sub-carriers for each of a plurality of antennas, with each antenna
5 transmitting the header OFDM symbol only on the respective set of sub-carriers.
16. A receiver according to claim 15 adapted to receive from N transmit antennas with a different set of sub-carriers separated by N sub-carriers assigned to each of
10 the plurality of transmit antennas.
17. A receiver according to claim 15 wherein the header OFDM symbols contain multiplexed dedicated pilot channel sub-carriers and common synchronization channel sub-carriers for each of the plurality of transmit antennas.
- 15 18. A receiver according to claim 17 wherein the header OFDM symbols further contain multiplexed broadcasting carriers for each of the plurality of antennas.
19. A receiver according to claim 15 adapted to receive a preamble having a prefix, followed by two
20 identical OFDM symbols having said header OFDM symbol format.
20. A receiver according to claim 15 wherein the dedicated pilot channel has a BTS specific mapped complex sequence, the receiver being adapted to perform BTS
25 identification on the basis of the dedicated pilot channel.
21. A receiver according to claim 19 wherein the dedicated pilot channel have a BTS specific mapped complex sequence, the receiver being adapted to perform BTS identification on the basis of the dedicated pilot channel.
- 30 22. A receiver according to claim 21 wherein the header OFDM symbols contain multiplexed dedicated pilot channel sub-carriers and common synchronization channel sub-

WO 03/034642

PCT/CA02/01542

44

carriers for each of the plurality of transmit antennas, the receiver being further adapted to perform course synchronization on the common synchronization channel by looking for a correlation peak between consecutive OFDM symbols which are identical.

23. A receiver according to claim 22 further adapted to perform fine synchronization on the basis of the common synchronization channel sub-carriers and/or the dedicated pilot channel sub-carriers.

10 24. A transmitter adapted to transmit a packet data frame structure comprising:

a superframe having a length corresponding to a synchronization period of a network;

the superframe containing a plurality of radio frames;

each radio frame containing a plurality of TPS (transmission parameter signalling) frames corresponding to an adaptive coding and modulation period;

each TPS frame containing a plurality of slots corresponding to an air interface slot size;

each slot containing a plurality of OFDM symbols, with the first two symbols of the first slot of the first TPS frame of each OFDM frame being used as header OFDM symbols.

25 25. A transmitter according to claim 24 wherein the header OFDM symbols have a header OFDM symbol format in which sub-carriers of a header OFDM symbol are divided into a non-contiguous set of sub-carriers for each of a plurality of antennas, with each antenna transmitting the header OFDM symbol only on the respective set of sub-carriers.

WO 03/034642

PCT/CA02/01542

45

26. A transmitter according to claim 24 wherein the header OFDM symbols contain multiplexed pilot channel sub-carriers and common synchronization channel sub-carriers for each of the plurality of antennas.

5 27. A transmitter according to claim 24 wherein the header OFDM symbols further contain multiplexed broadcasting channel sub-carriers for each of the plurality of antennas.

28. A transmitter according to claim 24 adapted to transmit in a plurality of different modes by transmitting a
10 different number of OFDM symbols per slot with an unchanged slot duration and with no change to the frame structure above the slot.

29. A transmitter according to claim 28 wherein modes with an increased number of OFDM symbols per slot are
15 realized by shortening OFDM symbol duration, and shortening FFT size, but not changing sampling frequency.

30. A transmitter according to claim 24 adapted to transmit to a respective set of users for each TPS frame and to signal for each TPS frame which users should demodulate
20 the entire TPS frame.

31. A receiver adapted to receive and process OFDM frames transmitted by the transmitter of claim 24.

32. A method of performing synchronization at an OFDM receiver comprising:

25 at each of at least one receive antenna, sampling a received signal to produce a respective set of time domain samples;

determining at least one course synchronization position;

30 at each of the at least one receive antenna:

WO 03/034642

PCT/CA02/01542

46

a) for each of a plurality of candidate fine synchronization positions about one of said at least one course synchronization position:

5 i) for each receive antenna positioning an FFT window to the candidate fine synchronization position and converting by FFT the time domain samples into a respective set of frequency domain components;

10 ii) for each said at least one transmit antenna, extracting a respective received training sequence corresponding to the transmit antenna from the sets of frequency domain components;

15 iii) for each transmit antenna, calculating a correlation between each respective received training sequence and a respective known transmit training sequence;

20 iv) combining the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position;

b) determining a fine synchronization position from the plurality of correlation values;

25 combining the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position.

33. A method according to claim 32 wherein a course synchronization position is determined for each receive antenna and used for determining the respective fine synchronization position.

30 34. A method according to claim 32 a course synchronization position is determined for each receive

WO 03/034642

PCT/CA02/01542

47

antenna and an earliest of the positions is used determining the fine synchronization positions for all receive antennas.

35. A method according to claim 33 wherein the course synchronization position is determined in the time domain
5 for at least one receive antenna by looking for a correlation peak between the time domain samples over two OFDM symbol durations.

36. A method according to claim 32 applied at an OFDM receiver having at least two antennas, combining the fine
10 synchronization positions from the at least one receive antenna in an overall fine synchronization position comprises selecting an earliest of the fine synchronization positions.

37. A method according to claim 32 wherein:
15 sampling a received signal to produce a set of time domain samples is done for at least three OFDM symbol durations;

determining at least one course synchronization position comprises performing a course synchronization in
20 the time domain by looking for a correlation peak between the time domain samples received over two OFDM symbol durations to identify a course synchronization position by:

a) calculating a plurality of correlation values, each correlation value being a correlation
25 calculated between a first set of time domain samples received during a first period having one OFDM symbol duration and a second set of time domain samples received during a second period immediately following the first period and having OFDM symbol duration, for each of a
30 plurality of starting times for said first period;

WO 03/034642

PCT/CA02/01542

48

b) identifying the course synchronization position to be a maximum in said plurality of correlation values.

38. A method according to claim 32 wherein:

5 combining the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position comprises multiplying together the correlations for the at least one transmit antenna for each candidate synchronization
10 position.

39. A method according to claim 32 applied to a single transmit antenna single receive antenna system.

40. A method according to claim 32 wherein the training sequence is received on common synchronization
15 channel sub-carriers.

41. A method according to claim 32 wherein the training sequence is received during an OFDM frame preamble.

42. A method according to claim 32 wherein the training sequence is received on dedicated pilot channel
20 sub-carriers.

43. A method according to claim 42 wherein the training sequence is received during an OFDM frame preamble.

44. An OFDM receiver comprising:

at least one receive antenna;
25 for each said at least one receive antenna, receive circuitry adapted to sample a received signal to produce a respective set of time domain samples;

a course synchronizer adapted to determine at least one course synchronization position;

WO 03/034642

PCT/CA02/01542

49

a fine synchronizer comprising at least one FFT, at least one correlator and at least one combiner, adapted to, at each of the at least one receive antenna:

a) for each of a plurality of candidate
5 fine synchronization positions about one of said at least one course synchronization position:

1) for each receive antenna
position an FFT window to the candidate fine synchronization position and convert by FFT the time domain samples into a
10 respective set of frequency domain components;

ii) for each said at least one
transmit antenna, extract a respective received training sequence corresponding to the transmit antenna from the sets of frequency domain components;

15 iii) for each transmit antenna, calculate a correlation between each respective received training sequence and a respective known transmit training sequence;

iv) combine the correlations for
20 the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position;

b) determine a fine synchronization position from the plurality of correlation values;

25 the receiver being further adapted to combine the fine synchronization positions from the at least one receive antenna in an overall fine synchronization position.

45. A receiver according to claim 44 having at least two receive antennas, adapted to combine the fine
30 synchronization positions from the at least one receive antenna in an overall fine synchronization position by selecting an earliest of the fine synchronization positions.

WO 03/034642

PCT/CA02/01542

50

46. A receiver according to claim 44 adapted to combine the correlations for the at least one transmit antennas to produce an overall correlation result for each candidate synchronization position by multiplying together
5 the correlations for the at least one transmit antenna for each candidate synchronization position.

47. A receiver according to claim 44 adapted to receive the training sequence on common synchronization channel sub-carriers.

10 48. A receiver according to claim 44 adapted to receive the training sequence on dedicated pilot channel sub-carriers.

49. A method of performing fine synchronization comprising:

15 at each at least one receive antenna receiving OFDM symbols containing a respective received frequency domain training sequence for each of at least one transmit antenna;

performing fine synchronization in the frequency
20 domain by looking for maximum correlations between known frequency domain training sequences and the received frequency domain training sequences.

50. A method of transmitting signals enabling fine synchronization comprising:

25 from each of at least one transmit antenna, transmitting OFDM symbols containing a respective frequency domain training sequence.

51. A method according to claim 50 wherein a different frequency domain training sequence is transmitted by each
30 transmit antenna, but the same frequency domain training sequence is transmitted by corresponding antenna of other transmitters.

WO 03/034642

PCT/CA02/01542

51

52. A method of performing cell selection at an OFDM receiver comprising:

at each of at least one receive antenna, sampling a received signal to produce a respective set of time domain samples;

determining at least one course synchronization position;

at each of the at least one receive antenna:

a) performing a frequency domain correlation between at least one received common synchronization sequence extracted from common synchronization channel sub-carriers in the received signal and a corresponding common synchronization sequence of a respective plurality of transmit antennas to identify a plurality of candidate correlation peaks;

b) selecting the M strongest correlation peaks for further processing;

c) at each correlation peak, reconverting time domain samples into frequency domain components and processing pilot channel sub-carriers, these containing transmitter specific information, to identify a transmitter associated with each correlation peak;

d) determining a C/I or similar value for each transmitter thus identified;

selecting the transmitter having the largest C/I determined for any of the at least one receive antenna.

53. A method according to claim 52 wherein performing a frequency domain correlation between at least one received common synchronization sequence extracted from common synchronization channel sub-carriers in the received signal and a corresponding common synchronization sequence of a

WO 03/034642

PCT/CA02/01542

52

respective plurality of transmit antennas to identify a plurality of candidate correlation peaks comprises:

a) for each of a plurality of candidate fine synchronization positions about one of said at least
5 one course synchronization position:

i) for each receive antenna positioning an FFT window to the candidate fine synchronization position and converting by FFT the time domain samples into a respective set of frequency domain
10 components;

ii) for each of at least one common synchronization sequence, each common synchronization sequence having been transmitted by a transmit antenna of each of at least one transmitter, extracting a respective
15 received training sequence corresponding to the transmit antennas from the sets of frequency domain components;

iii) for each of the at least one common synchronization sequence, calculating a correlation between each respective received common synchronization
20 sequence and a respective known common synchronization sequence;

iv) combining the correlations to produce an overall correlation result for each candidate synchronization position;
25 b) determining at least one peak in the correlations, each said at least one peak being local maxima in the correlations.

54. A method according to claim 53 further comprising:
reconverting time domain samples into frequency
30 domain components based on the fine synchronization position of the selected transmitter and performing a further fine

WO 03/034642

PCT/CA02/01542

53

synchronization based on a dedicated pilot channel for that transmitter.

55. A method according to claim 54 applied to a MIMO-OFDM frame format having a header symbol format in which
5 subcarriers of a header symbol are divided into a non-contiguous set of subcarriers for each of a plurality of antennas, with each antenna transmitting header symbols only on the respective set of sub-carriers, and wherein the header symbols contain multiplexed pilot channel sub-
10 carriers and common synchronization channel sub-carriers for each of the plurality of antennas, the frame beginning with two identical header OFDM symbols during which contents of the pilot channel sub-carriers are repeated and contents of the synchronization channel sub-carriers are repeated, the
15 common synchronization channel sub-carriers carrying a complex sequence which is different for respective antenna of one base station and being common across multiple base stations, and contents of the dedicated pilot channel sub-carriers being at least locally unique to a particular base
20 station.

56. A method according to claim 52 further comprising:
for transmitter switching, averaging the C/I or similar value over a time interval for each transmitter thus identified, and at the end of the time interval instigating
25 a transmitter switch to the transmitter with the largest average C/I or similar value if different from a currently selected transmitted.

WO 03/034642

PCT/CA02/01542

1/10

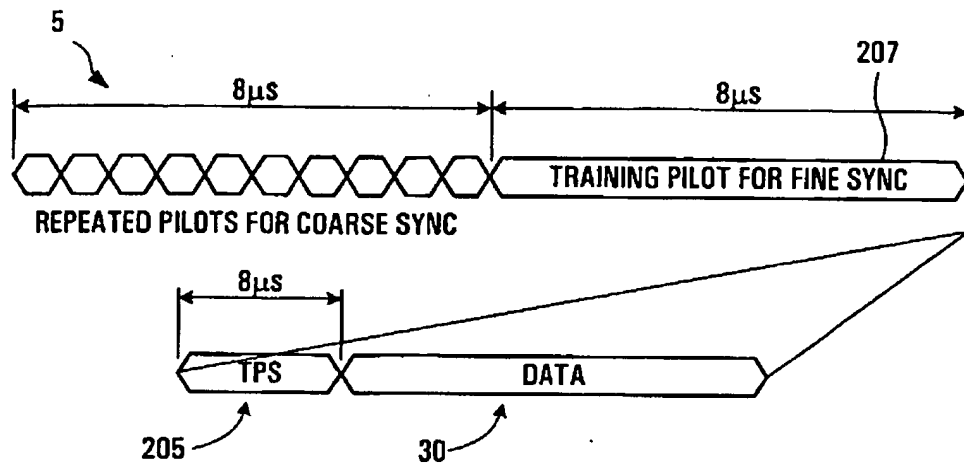


FIG. 1A

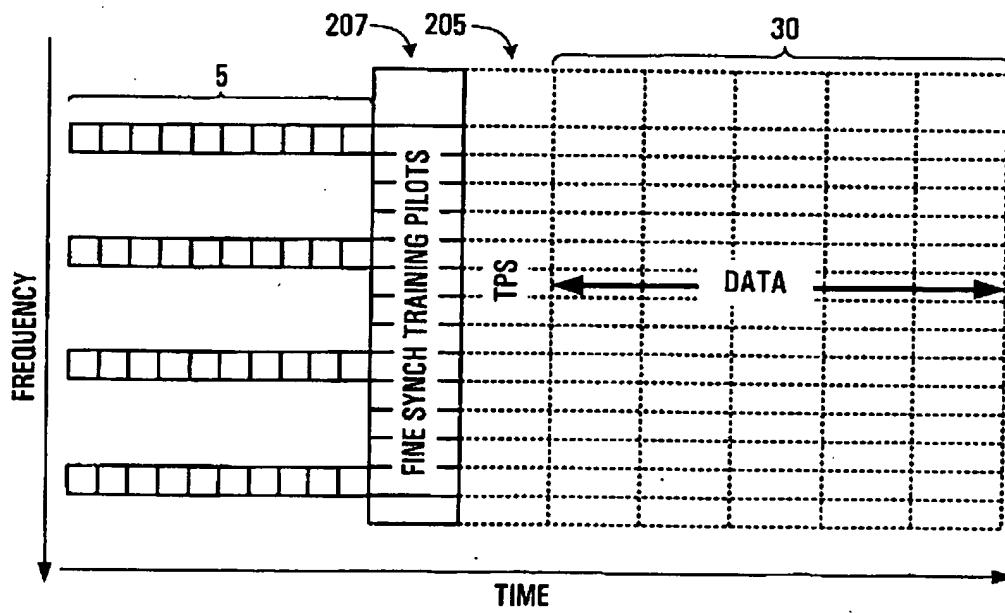


FIG. 1B

WO 03/034642

PCT/CA02/01542

2/10

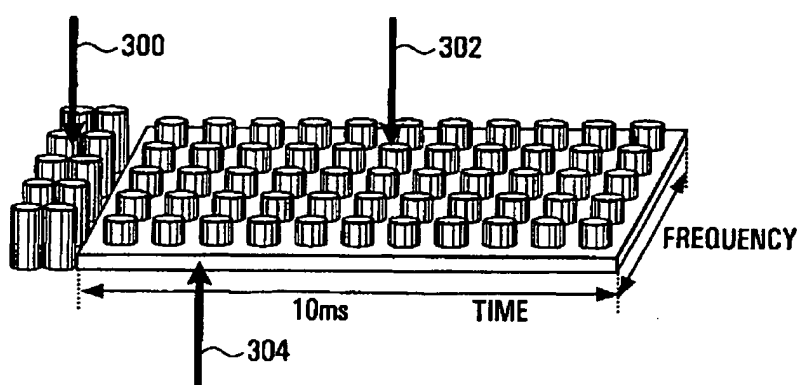


FIG. 2A

WO 03/034642

PCT/CA02/01542

3/10

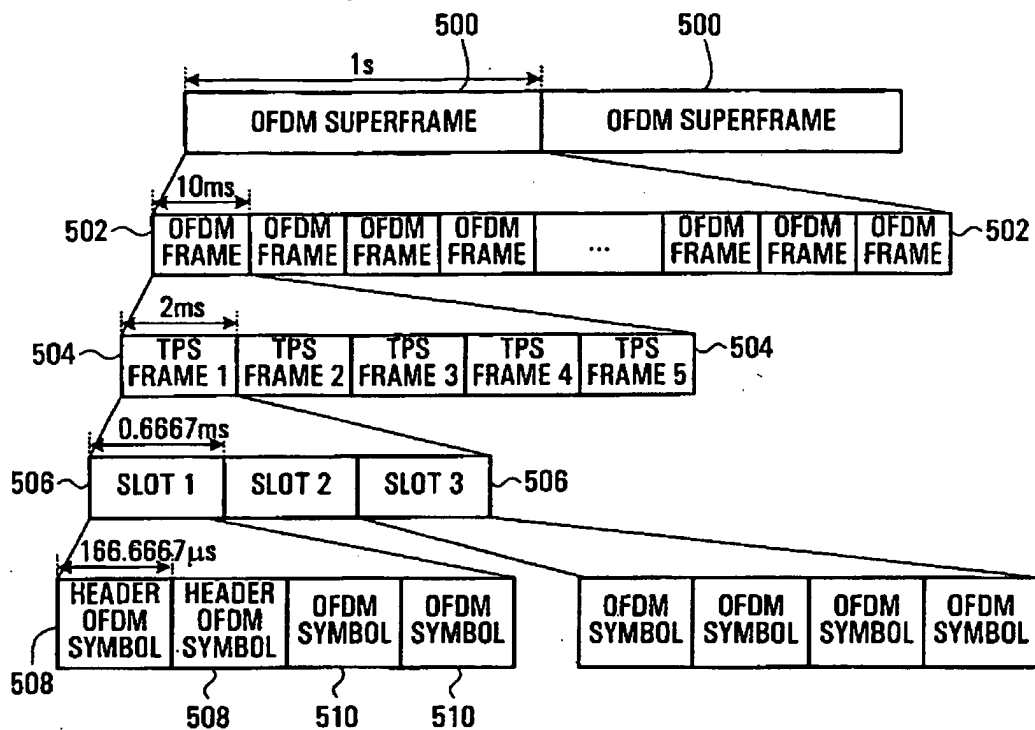


FIG. 2B

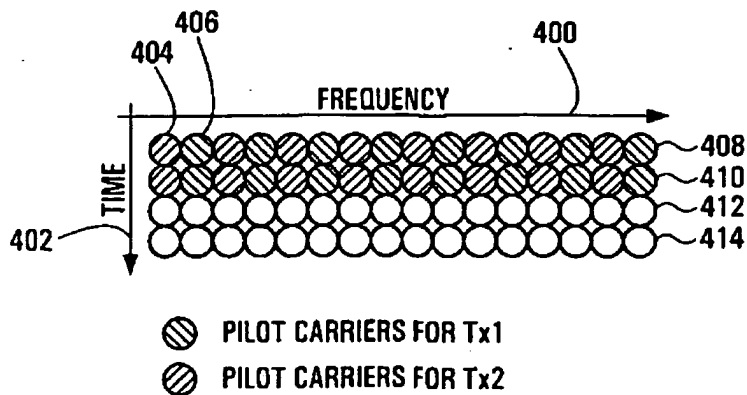


FIG. 2

WO 03/034642

PCT/CA02/01542

4/10

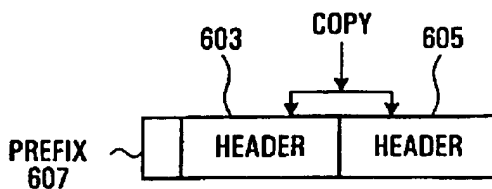


FIG. 4


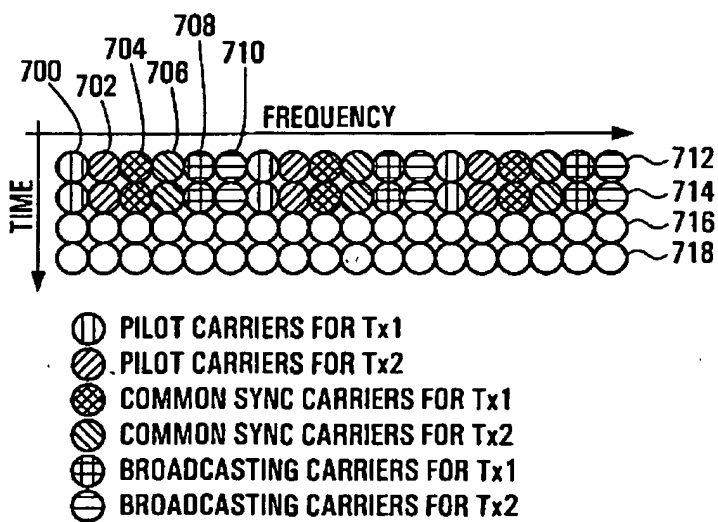


FIG. 5

WO 03/034642

PCT/CA02/01542

5/10

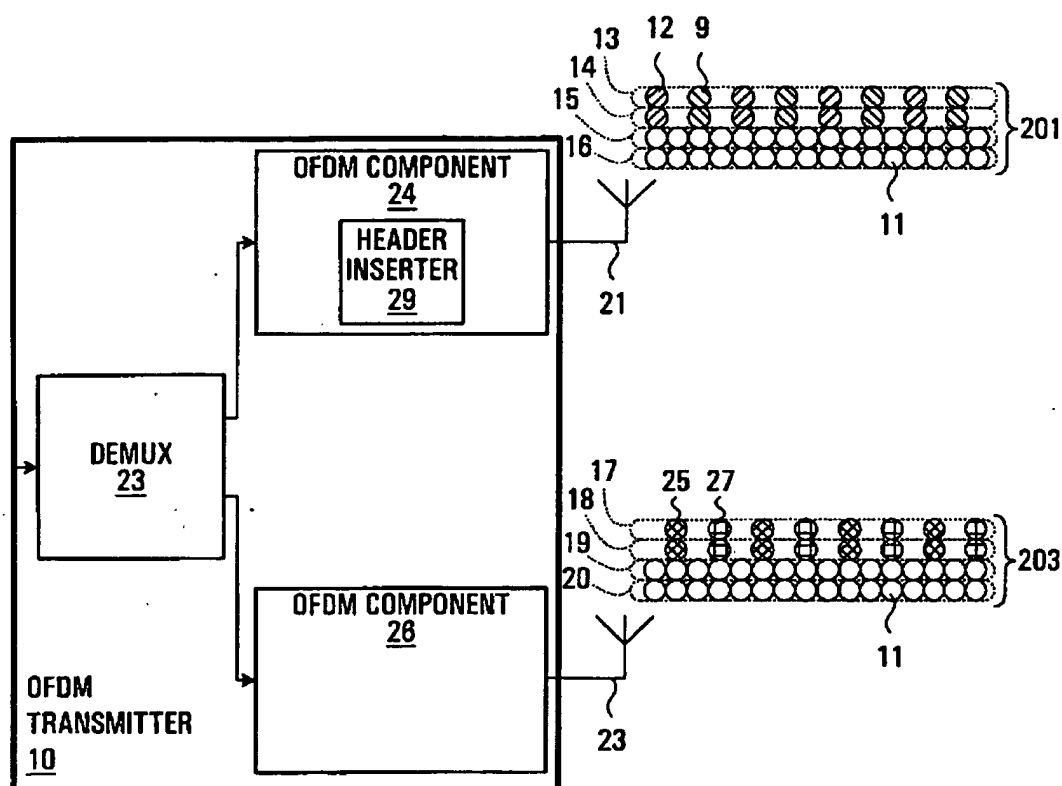

- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#1
- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#2
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#1
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#2

FIG. 6

WO 03/034642

PCT/CA02/01542

6/10


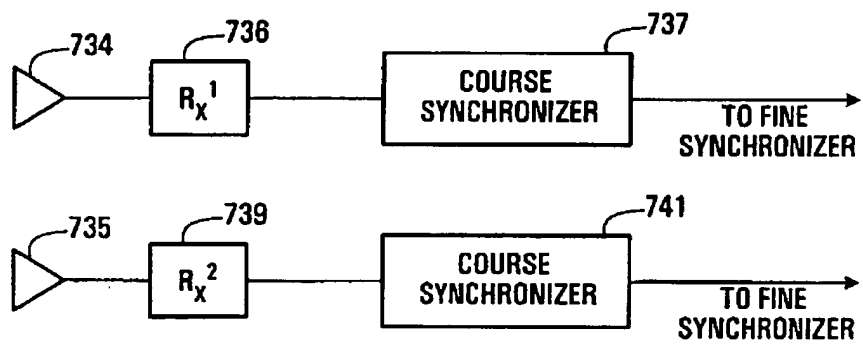


FIG. 7A

WO 03/034642

PCT/CA02/01542

7/10

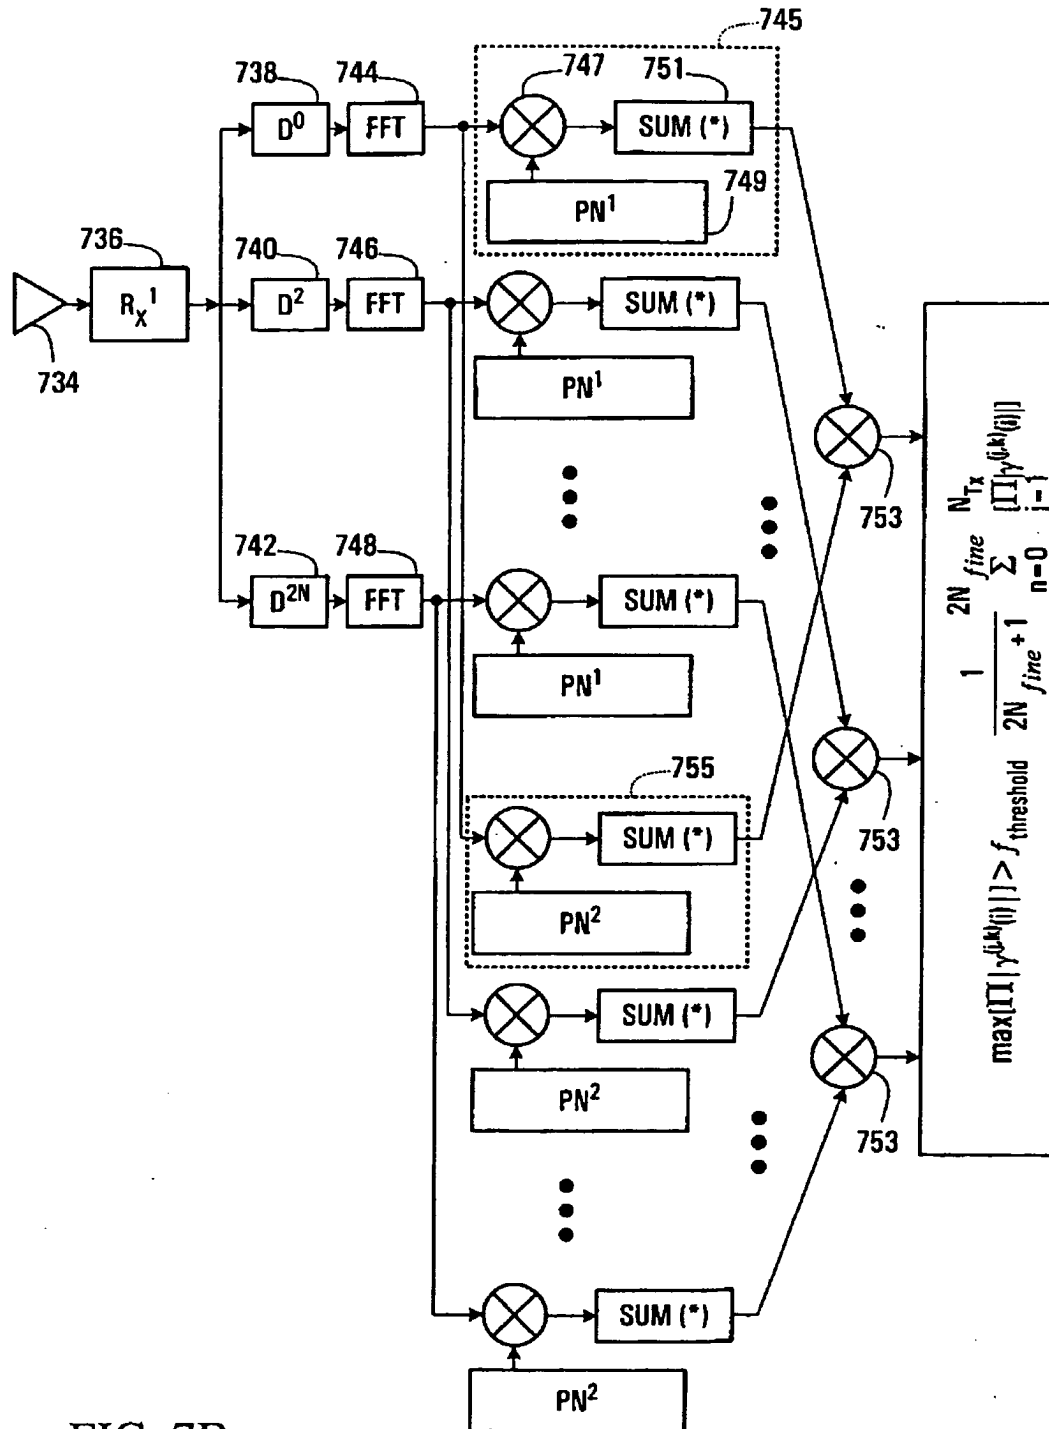

WO 03/034642

PCT/CA02/01542

8/10

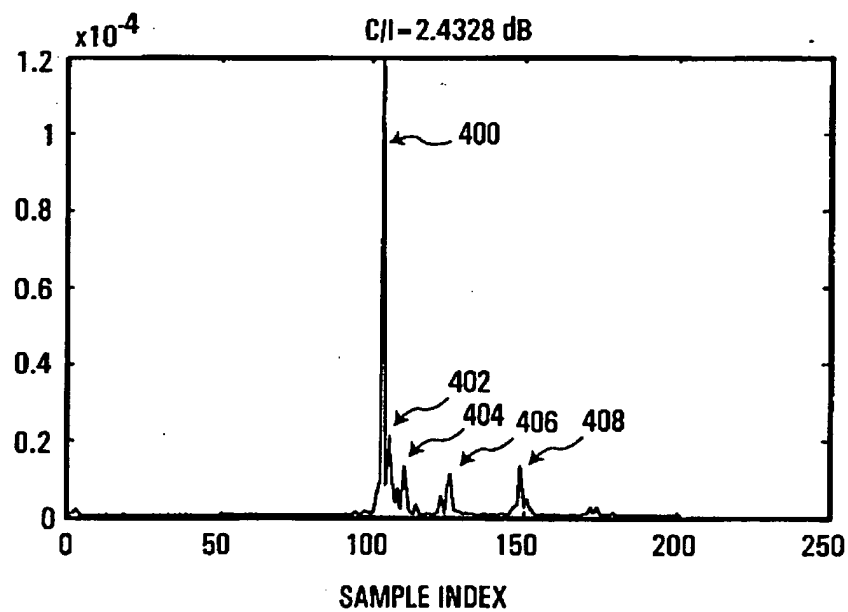


FIG. 8

WO 03/034642

PCT/CA02/01542

9/10

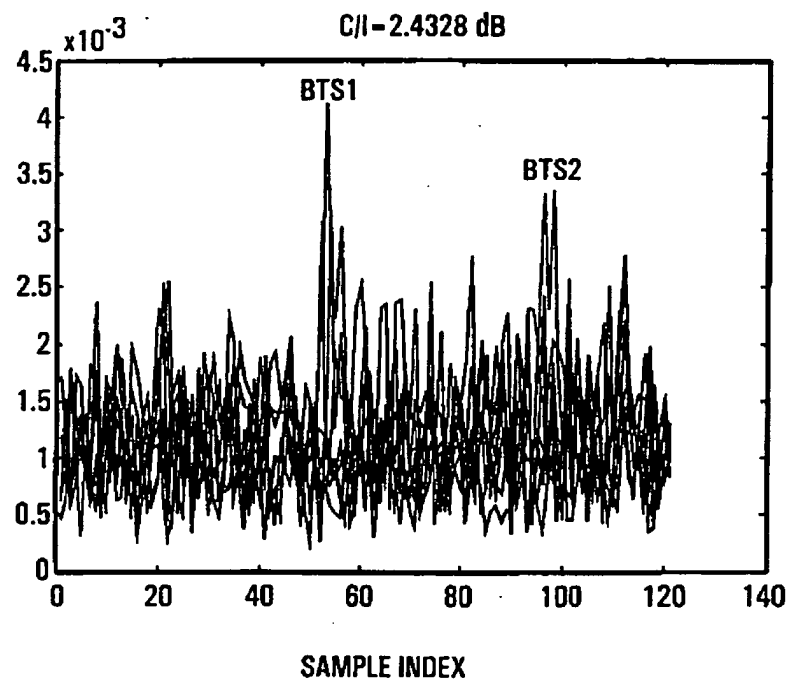


FIG. 9

WO 03/034642

PCT/CA02/01542

10/10

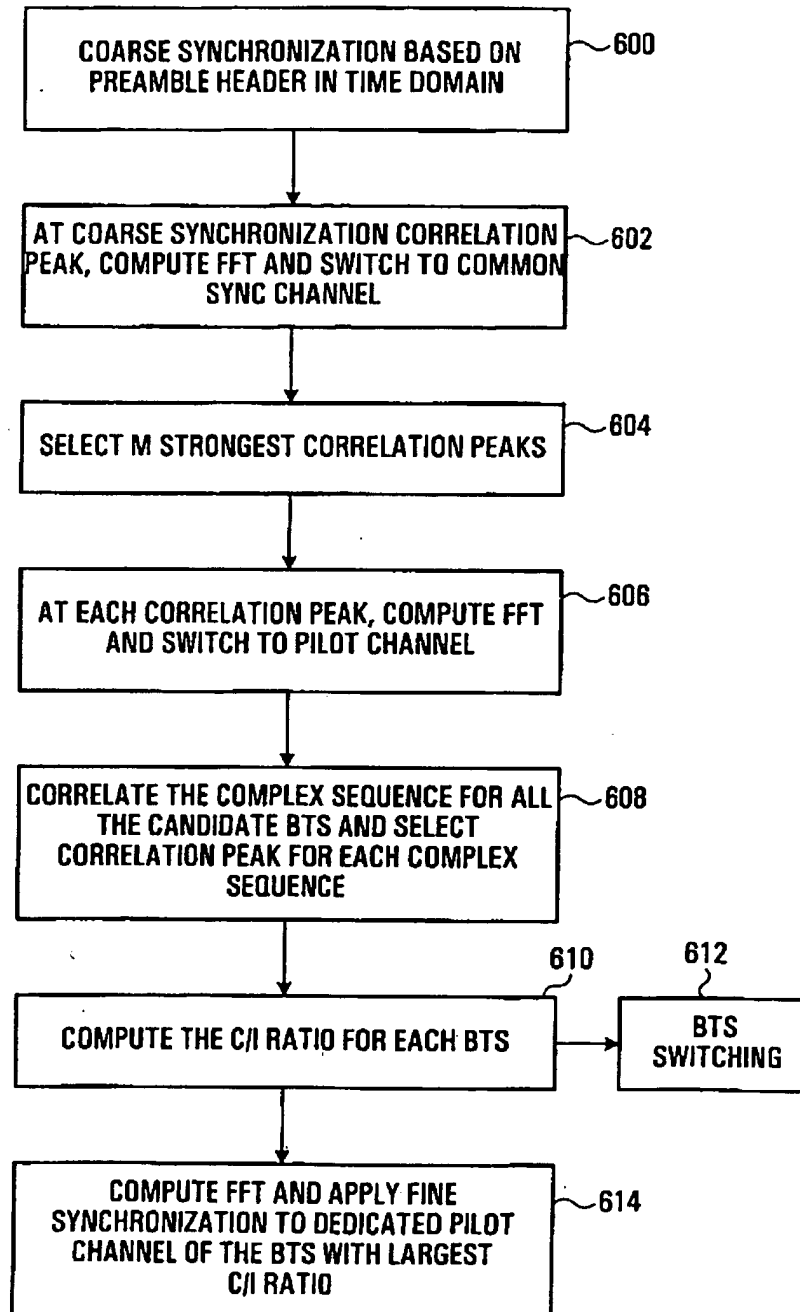


FIG. 10

RECEIVED
CENTRAL FAX CENTER

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT) NOV 03 2010

(19) World Intellectual Property
Organization
International Bureau



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

(43) International Publication Date
24 April 2003 (24.04.2003)


PCT

(10) International Publication Number
WO 2003/034642 A3

- (51) International Patent Classification⁷: H04L 1/06, 5/02, 27/26, H04B 7/06, H04Q 7/38
- (21) International Application Number: PCT/CA2002/001542
- (22) International Filing Date: 15 October 2002 (15.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/329,514 17 October 2001 (17.10.2001) US
60/329,507 17 October 2001 (17.10.2001) US
60/329,510 17 October 2001 (17.10.2001) US
10/038,915 8 January 2002 (08.01.2002) US
- (71) Applicant: NORTEL NETWORKS LIMITED
[CA/CA]; 2351 Boulevard Alfred-Nobel, St. Laurent, Quebec H4S 2A9 (CA).
- (72) Inventors: MA, Jjanglei; 3 Bon Echo Cres., Kanata, Ontario K2M 2W5 (CA). JIA, Ming; 609-320 Croydon Avenue, Ottawa, Ontario K2B 5P3 (CA). ZHU, Pelying; 16 Pebble Creek Cres., Kanata, Ontario K2M 2L4 (CA). TONG, Wen; 12 Whitestone Drive, Ottawa, Ontario K2C 4A7 (CA).
- (74) Agents: BRETT, R., Allan et al.; Smart & Biggar, 900-55 Metcalfe Street, P.O. Box 2999, Station D, Ottawa, Ontario K1P 5Y6 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SYNCHRONISATION IN MULTICARRIER CDMA SYSTEMS

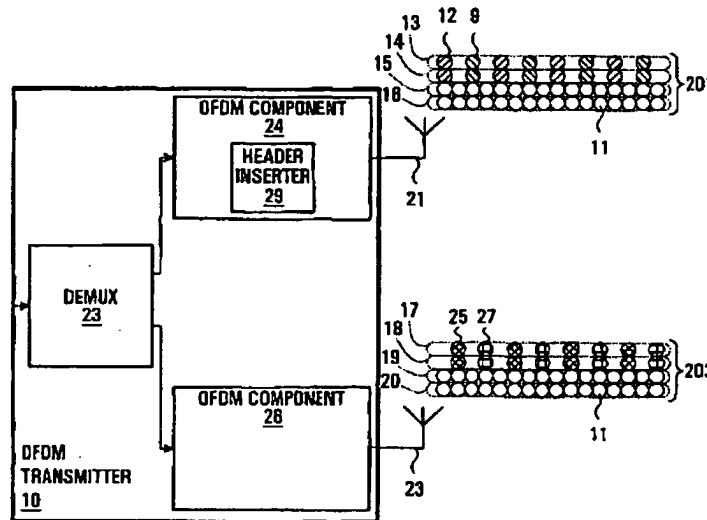

(57) Abstract: A method and apparatus are provided for performing acquisition, synchronization and cell selection within an MIMO-OFDM communication system. A coarse synchronization is performed to determine a searching window. A fine synchronization is then performed by measuring correlations between subsets of signal samples, whose first signal sample lies within the searching window, and known values. The correlations are performed in the frequency domain of the received signal. In a multiple-output OFDM system, each antenna of the OFDM transmitter has a unique known value. The known value is transmitted as pairs of consecutive pilot symbols, each pair of pilot symbols being transmitted at the same subset of sub-carrier frequencies within the OFDM frame.

- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#1
- ⊗ -DEDICATED PILOT CHANNEL FOR ANT#2
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#1
- ⊗ -COMMON SYNCHRONIZATION CHANNEL FOR ANT#2

WO 2003/034642 A3

INTERNATIONAL SEARCH REPORT

International Application No

P 02/01542

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L1/06 H04L5/02 H04L27/26 H04B7/06 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 76110 A (QUALCOMM) 11 October 2001 (2001-10-11) page 24, line 31 - page 25, line 9	1
A		24-31
X,P	EP 1 185 048 A (NORTEL) 6 March 2002 (2002-03-06) column 6, line 28 - line 34 paragraph [0034] paragraph [0035]	1-10, 32-51
A		24-31, 52-56
L	casts doubt on the validity of the claimed priority	

	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 October 2003

Date of mailing of the international search report

12.11.2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Scriven, P

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/CA 02/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 2002/122381 A1 (SHIQUAN WU ET AL.) 5 September 2002 (2002-09-05) figure 4 paragraph [0038]	1,32-49
A	---	24-31, 52-56
A,P	EP 1 185 001 A (NORTEL) 11 October 2001 (2001-10-11) abstract	1-10, 24-31, 50,51
A,P	---	1,24
A,P	BARHUMI ET AL.: "Optimal training sequences for channel estimation in MIMO OFDM systems in mobile wireless channels" INTERNATIONAL ZURICH SEMINAR ON BROADBAND COMMUNICATIONS, 19 - 21 February 2002, XP010584424 Piscataway, US abstract	1,24
A,P	---	1,24
A,P	STAMOULIS ET AL.: "Intercarrier interference in MIMO OFDM" IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, 28 April 2002 (2002-04-28) - 2 May 2002 (2002-05-02), pages 485-489, XP002240513 New York, US abstract	1,24
X	---	24-31
X	CHUANG ET AL.: "Power control for dynamic packet assignment in advanced cellular internet service" IEEE VEHICULAR TECHNOLOGY CONFERENCE, 18 - 21 May 1998, pages 1750-1754, XP000903320 New York, US figure 2	24-31
X	---	24-31
X	BAKKER ET AL.: "An air interface for high bandwidth cellular digital communications on microwave frequencies" IEEE VEHICULAR TECHNOLOGY CONFERENCE, 18 - 21 May 1998, pages 132-138, XP000905827 New York, US section 3B	24-31

-/--

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/CA 02/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	VOGIATZIS, SANCHEZ-P: "An adaptive multicarrier wireless access system" IEEE CONFERENCE ON WIRELESS COMMUNICATIONS AND NETWORKING, 23 - 28 September 2000, pages 298-303, XP010532513 New York, US figure 2 ---	24-31
X	LI ET AL.: "Dynamic time-division-duplex wireless local loop" IEEE VEHICULAR TECHNOLOGY CONFERENCE, 24 - 28 September 2000, pages 1078-1085, XP000988547 New York, US ISBN: 0-7803-6508-9 the whole document ---	24-31
X	WO 98 37654 A (AT&T) 27 August 1998 (1998-08-27) figure 28 ---	24-31
X	GB 2 320 871 A (DAEWOO ELECTRONICS) 1 July 1998 (1998-07-01) page 3, line 4-6 page 3, line 12 - line 15 ---	24-31
X	WO 98 19410 A (DISCOVISION) 7 May 1998 (1998-05-07) page 40, line 3 - line 9 ---	24-31
X,P	US 2002/080887 A1 (YOUNG-HO JEONG ET AL.) 27 June 2002 (2002-06-27) figure 3 paragraph [0089] ---	24-31
X,P	WO 02 17615 A (LIN YANG, ZHI-XING YANG) 28 February 2002 (2002-02-28) figure 5 ---	24-31
X	CZYLWIK: "Synchronization for systems with antenna diversity" IEEE VEHICULAR TECHNOLOGY CONFERENCE, 19 - 22 September 1999, pages 728-732, XP000924606 New York, US figure 3 ---	32-49
A	---	52-56
	--- -/--	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 02/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	TUFVESSON ETAL.: "Time and frequency synchronization for OFDM using PN-sequence preambles" IEEE VEHICULAR TECHNOLOGY CONFERENCE, 19 - 22 September 1999, pages 2203-2207, XP000896004 New York, US figure 2	32-49
A	---	52-56
X	MÜLLER-WEINFURTER: "Frequency-domain frame synchronization for optimum frequency-differential demodulation of OFDM" IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, 5 - 9 December 1999, pages 857-862, XP000956736 New York, US section 3	32-49
A	---	52-56
X,P	US 2002/122382 A1 (JIANGLEI MA ET AL.) 5 September 2002 (2002-09-05) paragraph [0008] paragraph [0038] paragraph [0039]	32-49
A	---	52-56
L	completes the disclosures of EP1185048 and of US2002/0122381	
X,P	YINGJUN ZHANG ET AL.: "Multiuser subcarrier and bit allocation along with adaptive cell selection for OFDM transmission" IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, 28 April 2002 (2002-04-28) - 2 May 2002 (2002-05-02), pages 861-865, XP010589616 New York, US page 862, right-hand column, paragraph 4 * section IV *	52-56
A	---	52-56
	EP 1 096 822 A (MATSUSHITA) 2 May 2001 (2001-05-02) paragraph [0022] paragraph [0039] paragraph [0080] ---	
	--- -/--	

Form PCT/CA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/ISA 02/01542

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>HENRY, KORI: "DECT based rural radio local loop for developing countries" IEEE CONFERENCE ON PERSONAL WIRELESS COMMUNICATIONS, 19 - 21 February 1996, pages 44-46, XP010158284 New York, US ISBN: 0-7803-3177-X page 45, left-hand column, paragraph 2 -----</p>	52-56

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA 02/01542

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 11-23
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1998)

International Application No. PCT/CA 02/01542

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-23, 50-51

Header format and training sequence for MIMO-OFDM transmission

2. Claims: 24-31

Packet data frame structure

3. Claims: 32-49

Synchronisation in an OFDM receiver

4. Claims: 52-56

Cell selection

International Application No. PCT/CA 02/01542

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box 1.2

Claims Nos.: 11-23

Claims 11-14 each refer back to a previous claim, in which no preamble is defined. The reference to "said preamble" in these claims, therefore, is unclear, and it is not possible to determine the subject matter they seek to define.

Claims 15-23 seek to define a receiver. However, none of these claims defines any specific feature of a receiver. Each refers only to features of the received signal. Since it seems entirely possible to receive these signals with a standard MIMO receiver, it is not apparent which features are necessary to make such a receiver "adapted to receive [the] header format". It is, therefore, not possible to determine the subject matter these claims seek to define.

Claims 24-30 seek to define a transmitter, but do not do so in terms of the technical features of a transmitter. The only technical features given define a signal, rather than a transmitter. Therefore, the search for the subject matter of these claims has been directed to a signal, rather than to a transmitter. Similarly, claim 31 seeks to define a receiver, but fails to do so in terms of the technical feature the receiver must have. The search for the subject matter of this claim has also been directed to the signal.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 02/01542

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0176110 A	11-10-2001	US 6473467 B1	29-10-2002
		AU 4592101 A	15-10-2001
		CA 2402152 A1	11-10-2001
		EP 1269665 A2	02-01-2003
		NO 20024634 A	20-11-2002
		TW 508922 B	01-11-2002
		WO 0176110 A2	11-10-2001
EP 1185048 A	06-03-2002	US 2002041635 A1	11-04-2002
		CA 2351140 A1	01-03-2002
		CA 2355433 A1	01-03-2002
		EP 1185001 A2	06-03-2002
		EP 1185048 A2	06-03-2002
		US 2002122383 A1	05-09-2002
		US 2002122381 A1	05-09-2002
		US 2002122382 A1	05-09-2002
US 2002122381 A1	05-09-2002	CA 2351140 A1	01-03-2002
		CA 2355433 A1	01-03-2002
		EP 1185001 A2	06-03-2002
		EP 1185048 A2	06-03-2002
		US 2002122383 A1	05-09-2002
		US 2002122382 A1	05-09-2002
		US 2002041635 A1	11-04-2002
EP 1185001 A	06-03-2002	US 2002122383 A1	05-09-2002
		CA 2351140 A1	01-03-2002
		CA 2355433 A1	01-03-2002
		EP 1185001 A2	06-03-2002
		EP 1185048 A2	06-03-2002
		US 2002122381 A1	05-09-2002
		US 2002122382 A1	05-09-2002
		US 2002041635 A1	11-04-2002
WO 9837654 A	27-08-1998	US 2002159506 A1	31-10-2002
		WO 9837654 A2	27-08-1998
		US 6600776 B1	29-07-2003
GB 2320871 A	01-07-1998	KR 221336 B1	15-09-1999
		CN 1190299 A	12-08-1998
		DE 19758014 A1	02-07-1998
		FR 2758031 A1	03-07-1998
		IT T0971129 A1	29-06-1998
		JP 10210000 A	07-08-1998
		US 6172993 B1	09-01-2001
WO 9819410 A	07-05-1998	AT 196218 T	15-09-2000
		AU 737361 B2	16-08-2001
		AU 3991697 A	07-05-1998
		AU 727726 B2	21-12-2000
		AU 5147198 A	22-05-1998
		BR 9712722 A	26-10-1999
		CA 2199111 A1	30-04-1998
		CN 1181673 A	13-05-1998
		CN 1249099 A	29-03-2000
		DE 69703016 D1	12-10-2000
		DE 69703016 T2	05-04-2001
		EP 0840485 A2	06-05-1998

Form PCT/ISA/210 (patent family annex) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 02/01542

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9819410	A		EP 0938795 A2	01-09-1999
			GB 2318953 A	06-05-1998
			IL 122020 A	21-11-2000
			JP 10150428 A	02-06-1998
			JP 2001527706 T	25-12-2001
			KR 2000052956 A	25-08-2000
			SG 55399 A1	21-12-1998
			WO 9819410 A2	07-05-1998
			US 6359938 B1	19-03-2002

US 2002080887	A1	27-06-2002	KR 2002031009 A	26-04-2002

WO 0217615	A	28-02-2002	CN 1288330 A	21-03-2001
			AU 8676201 A	04-03-2002
			WO 0217615 A2	28-02-2002

US 2002122382	A1	05-09-2002	CA 2351140 A1	01-03-2002
			CA 2355433 A1	01-03-2002
			EP 1185001 A2	06-03-2002
			EP 1185048 A2	06-03-2002
			US 2002122383 A1	05-09-2002
			US 2002122381 A1	05-09-2002
			US 2002041635 A1	11-04-2002

EP 1096822	A	02-05-2001	JP 2001128215 A	11-05-2001
			CN 1295390 A	16-05-2001
			EP 1096822 A2	02-05-2001

Form PCT/ISA/210 (patent family annex) (July 1992)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 April 2003 (24.04.2003)


PCT

(10) International Publication Number
WO 2003/034642 A3

- (51) International Patent Classification⁷: **H04L 1/06**, 5/02, 27/26, H04B 7/06, H04Q 7/38
- (21) International Application Number: **PCT/CA2002/001542**
- (22) International Filing Date: 15 October 2002 (15.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/329,514 17 October 2001 (17.10.2001) US
60/329,507 17 October 2001 (17.10.2001) US
60/329,510 17 October 2001 (17.10.2001) US
10/038,915 8 January 2002 (08.01.2002) US
- (71) Applicant: **NORTEL NETWORKS LIMITED**
[CA/CA]; 2351 Boulevard Alfred-Nobel, St. Laurent, Quebec H4S 2A9 (CA).
- (72) Inventors: **MA, Jianglei**; 3 Bon Echo Cres., Kanata, Ontario K2M 2W5 (CA). **JIA, Ming**; 609-320 Croydon Avenue, Ottawa, Ontario K2B 5P3 (CA). **ZHU, Pelying**; 16 Pebble Creek Cres., Kanata, Ontario K2M 2L4 (CA). **TONG, Wen**; 12 Whitestone Drive, Ottawa, Ontario K2C 4A7 (CA).
- (74) Agents: **BRETT, R., Allan et al.**; Smart & Biggar, 900-55 Metcalfe Street, P.O. Box 2999, Station D, Ottawa, Ontario K1P 5Y6 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SYNCHRONISATION IN MULTICARRIER CDMA SYSTEMS

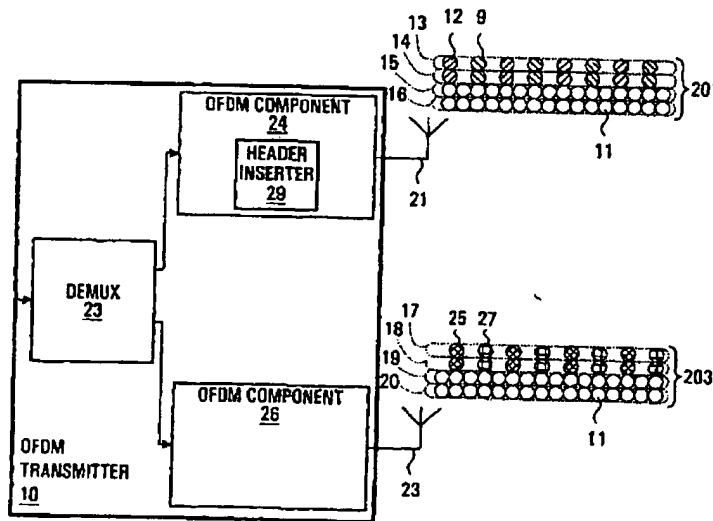

(57) Abstract: A method and apparatus are provided for performing acquisition, synchronization and cell selection within an MIMO-OFDM communication system. A coarse synchronization is performed to determine a searching window. A fine synchronization is then performed by measuring correlations between subsets of signal samples, whose first signal sample lies within the searching window, and known values. The correlations are performed in the frequency domain of the received signal. In a multiple-output OFDM system, each antenna of the OFDM transmitter has a unique known value. The known value is transmitted as pairs of consecutive pilot symbols, each pair of pilot symbols being transmitted at the same subset of sub-carrier frequencies within the OFDM frame.

- ⊙ - DEDICATED PILOT CHANNEL FOR ANT#1
- ⊙ - DEDICATED PILOT CHANNEL FOR ANT#2
- ⊙ - COMMON SYNCHRONIZATION CHANNEL FOR ANT#1
- ⊙ - COMMON SYNCHRONIZATION CHANNEL FOR ANT#2

WO 2003/034642 A3

THESE RESULTS ARE IN ACCORD WITH THE FINDINGS OF OTHER STUDIES THAT HAVE SHOWN THAT THE USE OF A SINGLE-STEP PROCESS IS MORE EFFECTIVE THAN A TWO-STEP PROCESS IN IMPROVING STUDENT PERFORMANCE.

— with amended claims

Date of publication of the amended claims: 4 March 2004

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2003/034642

54

PCT/CA2002/001542

AMENDED CLAIMS

**Received by the International Bureau on 12 January 2004 :
Claims 9 to 14 are new.**

9. A transmitter according to claim 3 wherein the common synchronization channel is used for course synchronization and fine synchronization and the pilot channel is used for fine synchronization.
- 5 10. A transmitter according to claim 3 wherein the common synchronization channel is used to transmit a complex sequence which is different for each transmit antenna of one transmitter, but which is common for respective transmit antennas of different transmitters within a communications
10 network.
11. A transmitter according to claim 5 adapted to transmit OFDM frames beginning with said preamble, and having scattered pilots throughout a remainder of the OFDM symbols in each OFDM frame.
- 15 12. A transmitter according to claim 5 wherein during the preamble, for each of N transmit antennas, dedicated pilot channel sub-carriers are transmitted and common synchronization channel sub-carriers are transmitted and broadcasting channel sub-carriers are transmitted.
- 20 13. A transmitter according to claim 5 wherein the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {dedicated pilot channel for each of N transmit antennas, common synchronization channel sub-carrier for each of N transmit antennas} arranged in a
25 predetermined order.
14. A transmitter according to claim 5 wherein the sub-carriers of the preamble OFDM symbols are organized as a repeating sequence of {at least one dedicated pilot channel sub-carrier for each of N transmit antennas, at least one
30 common synchronization channel sub-carrier for each of N transmit antennas, at least one broadcast channel sub-carrier} arranged in a predetermined order.

AMENDED SHEET (ARTICLE 19)